


# ONKYO SERVICE MANUAL

## SYNTHESIZED FM STEREO TUNER

### MODEL T-9090 II

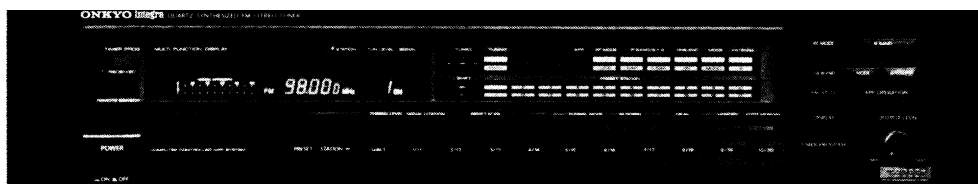

UD, UDN, UDC | 120V AC, 60Hz |

UQA, UQB

240V AC, 50Hz

#### SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY MARK  $\triangle$  ON THE SCHEMATIC DIAGRAM AND IN THE PARTS LIST ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE THESE COMPONENTS WITH ONKYO PARTS WHOSE PARTS NUMBERS APPEAR AS SHOWN IN THIS MANUAL.

MAKE LEAKAGE-CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.

#### TABLE OF CONTENTS

|                               |    |
|-------------------------------|----|
| Specifications .....          | 2  |
| Service procedures .....      | 2  |
| Exploded view .....           | 4  |
| Parts list .....              | 5  |
| Circuit descriptions .....    | 6  |
| IC block diagram .....        | 12 |
| Block diagram .....           | 17 |
| Adjustment procedures .....   | 18 |
| Main circuit .....            | 21 |
| Digital/Display circuit ..... | 25 |
| .....                         | 27 |
| -parts list .....             | 23 |
| Packing view .....            | 28 |

# ONKYO

## AUDIO COMPONENTS

## SPECIFICATIONS

|                            |                                               |                            |                                  |
|----------------------------|-----------------------------------------------|----------------------------|----------------------------------|
| Tuning Range:              | 87.5 – 108.0MHz<br>(AUTO MODE 50kHz steps,    | AM Suppression Ratio:      | 60dB                             |
|                            | Dev.) DIN                                     | Total Harmonic Distortion: | Mono: 0.009% (IF: wide)          |
|                            | Stereo: 20.0μV, (S/N 46dB,<br>40kHz Dev.) DIN |                            |                                  |
| 50dB Quieting Sensitivity: | Mono: 15.8dBf, 1.7μV                          | Stereo Separation:         | 55dB at 1kHz (IF: wide)          |
|                            | Stereo: 37.2dBf, 20μV                         |                            | 33dB at 70 – 10,000Hz (IF: wide) |
| Capture Ratio:             | 1.0dB                                         | Output Voltage:            | 0 – 1.5V                         |
| Image Rejection Ratio:     | 100dB                                         | Dimensions (W × H × D):    | 465 × 103 × 387mm                |
| IF Rejection Ratio:        | 100dB                                         |                            | 18-5/16" × 4-1/16" × 15-1/4"     |
| Signal-to-Noise Ratio:     | Mono: 95dB (IHF)                              | Weight:                    | 8.5kg, 18.7lbs.                  |
|                            | Stereo: 85dB (IHF)                            |                            |                                  |
| Selectivity:               | 80dB (±300kHz, IF: super<br>narrow)           |                            |                                  |

Specifications and features are subject to change without notice.

## SERVICE PROCEDURES

### 1. Replacing the lamp

This unit uses the lamp listed below.

| Circuit no. | Parts no. | Description                                |
|-------------|-----------|--------------------------------------------|
| Q754        | 210064A   | PL 6.3V, 250mA, Dial<br>plate illumination |

### 2. Safety-check out (D model)

After correcting the original service problem, perform the following safety check before releasing the set to the customer:

Connect the insulating-resistance tester between the plug of power supply cable and tapping screw holding the back panel and top cover.

Specification:  $3.3M\Omega \pm 10\%$  at 500V

### 3. Change of De-emphasis

W models are equipped with a 50μsec-75μsec selector switch. This switch is located on the back panel. This switch is set to 50μsec at the factory, but may have to be reset to 75μsec depending on the area where the unit is used.

Europe: 50μsec

U.S.A.: 75μsec

### 4. Change of voltage

W models are equipped with a voltage selector to conform with local power supplies. This switch is located on the back panel. Be sure to set this switch to match the voltage of the power supply in your area before turning the power switch on.

This switch is set to 220V at the factory. Voltage is changed by sliding the groove in the switch with the screwdriver to the right or left. Confirm that the switch has been moved all the way to the right or left before turning the power switch on.

### 5. Memory Preservation

This unit does not require memory preservation batteries. A built-in memory power back-up system preserves contents of the memory during power failures and even when the unit is unplugged. The unit must be plugged in and the power switch turned on and off once in order to charge the back-up system. Note that since this is not a permanent memory, the power switch must be turned on and off a few times each month to keep the back-up system operable. The period of time during which memory contents are preserved after power has last been turned off varies depending on climate and the location and placement of the unit. On the average, memory contents are protected over a period of 3 to 4 weeks (a minimum of 2 weeks) after the last time power has been turned off. This period is shorter when the unit is exposed to very high humidity or used in an area with an extremely humid climate.

## 6. Procedures for replacement of flat packaged ICs

### 1. Tools to be used:

- (1) **Soldering iron** . . . . Grounded soldering iron or

distance of 10 mm or more.

Form of soldering iron's tip:




Fig. 1

- (2) **Magnifying glass** . . . for checking of finished works  
 (3) **Tweezers** . . . . . for handling of IC and forming of leads  
 (4) **Grounding ring** . . . . Countermeasure for electrostatic breakdown  
 (5) **Nipper** . . . . . for removing defective IC  
 (6) **Small brush** . . . . . for application of flux

### 2. Work Procedures:

#### (1) Remove the defective IC

Cut all leads of the defective IC one by one using a nipper and remove the IC.

#### (2) Clean the pattern surface of the PC board.

Get rid of the remaining leads and solder.

#### (3) Check and from the leads of the new flat packaged IC to be installed.

From every lead on the new IC using a pair of tweezers, so that all of them are aligned neatly without being risen, twisted or inclined toward one side. Especially the rising portion of every lead must be formed with greatest care.

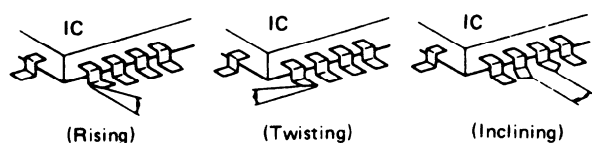


Fig. 2

#### (4) Apply flux to the PC board.

Apply flux to the pattern surface of the PC board which has been cleaned, as shown in the illustration. The area to be applied with flux is the portion of about 2.5mm in width where the IC's leads are to be soldered.

Be careful to apply minimum amount of flux required so as not to smear it on unwanted areas.

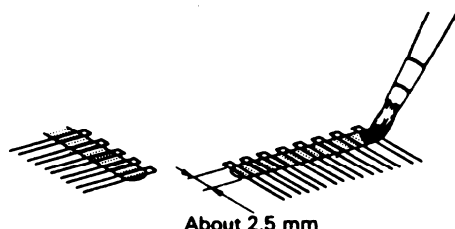


Fig. 3

#### (5) Temporarily tighten the IC

Carefully align the pattern and IC's leads, so that the IC will be temporarily tightened to the pattern

soldering is required, but no need to apply soldering material.




Fig. 4

#### (6) Apply flux to IC's leads

Apply flux to the areas of IC's leads where soldering is to be performed. Be careful not to smear flux on the root portion of any lead or the body of IC.

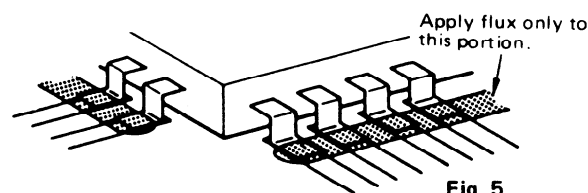


Fig. 5

#### (7) Soldering

While attaching the tip of the soldering iron to the soldering point as shown in the illustration, feed 2-5mm of soldering wire. Then, slowly move the iron in the direction indicated by the arrow in the illustration, so that the leads will be soldered to the pattern. Move the iron in the rate of approximately 1cm in 5sec. Proceed with your work while confirming a clean fillet of solder is formed on each lead, subsequent to the melting of flux.

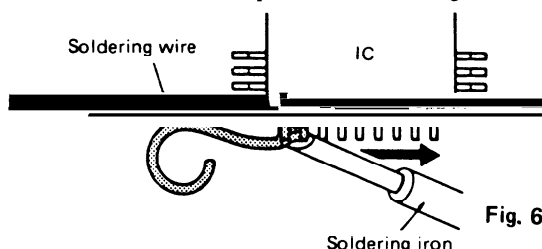


Fig. 6


### CAUTION

- 1) If you move the iron too quickly, loose soldering is likely to result.
- 2) Be especially careful when soldering the first lead where loose soldering is most liable to be formed.

#### (8) Check the results

When soldering of all leads is finished, check the soldered portion on every lead with a magnifying glass. A tester must not be used or checking of any soldered position

# EXPLODED VIEW

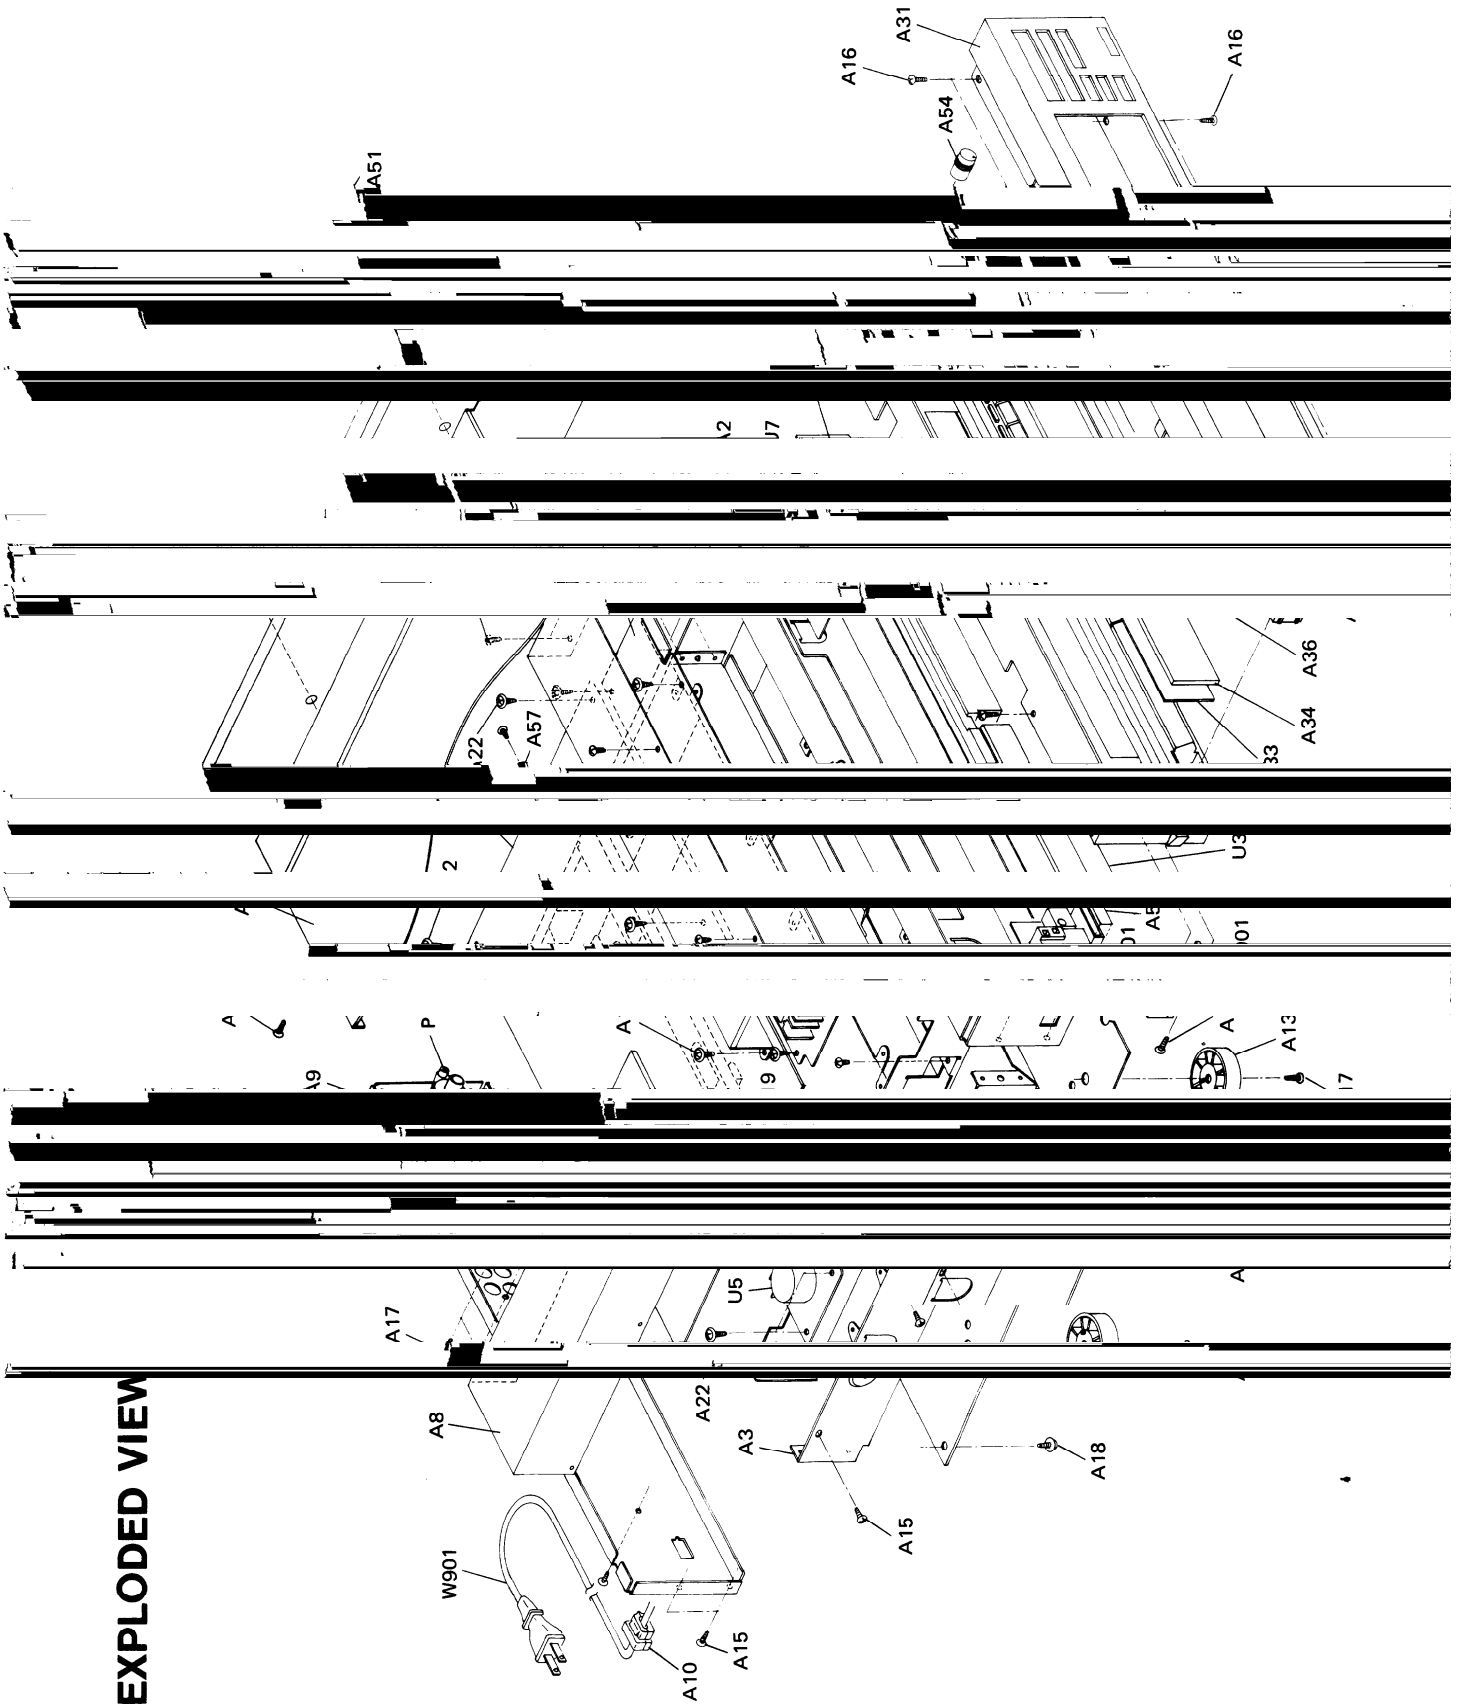

## PARTS LIST

| REF. NO. | PAR  | O.  | DESCRIPTION                 | REF. NO. | PA | NO.    | DESCRIPTION        | MARK  |
|----------|------|-----|-----------------------------|----------|----|--------|--------------------|-------|
| A1       | 2711 | 5B  | Front bracket ass'y         | A51      | 83 | 0303   | 4STV+30CQ(BC)      | △     |
| A2       | 2711 | 7A  | Front bracket RE            | A52      | 87 | 6      | Special washer     |       |
| A3       | 2711 | 8A  | Side bracket L              | A53      | 28 | 145A   | Knob POWER         |       |
| A4       | 2711 | 9A  | Side bracket R              | A54      | 28 | 031-1  | Knob TONE          |       |
| A5       | 2713 | 8   | Bracket FR                  | A55      | 28 | 172    | Film               |       |
| A6       | 2713 | 9   | Bracket RE                  | A56      | 28 | 144    | Insulated plate    |       |
| A7       | 2722 | 5A  | Shield cover FR             | A57      | 22 | 14-1   | Terminal           |       |
| A8       | 2722 | 6-1 | Shield cover PT             | C901     | 35 | 65A    | △ 0.01μF, AC400V   |       |
| A9       | 2712 | 2   | Back panel (D)              | C901a    | 27 | 601    | △ SB-1925, Cover f |       |
|          | 2712 | 3   | Back panel (G)              | P001     | 25 | 112    | NTM-1PDMR046       |       |
|          | 2712 | 5   | Back panel (W)              | P904     | 25 | 123    | △ NPS-1258P, Volt  |       |
|          | 2712 | 3   | Back panel (PX)             | S901     | 25 | 571    | △ NPS-111-1L53P,   | W/PX) |
| A10      | 2730 | 8   | Back panel (Q)              | T901     | 23 | 60     | △ NPT-973D, Powe   |       |
|          |      | 0   | △ Strainrelief              |          | 23 | 61     | △ NPT-973G, Powe   |       |
| A11      | 2725 | 4A  | Spacer                      |          | 23 | 62     | △ NPT-973DG, Pow   |       |
| A12      | 2717 | 2B  | Bottom board                |          | 23 | 75     | △ NPT-973Q, Powe   |       |
| A13      | 2717 | 2   | Leg                         | U1       | 14 | 590-1  | NARF-3090-1, M     |       |
| A14      | 8334 | 80  | 3TTP +8P(BC), Tapping screw |          | 14 | 590-1A | NARF-3090-1a, 1    |       |
| A15      | 8344 | 68  | 3TTS+6B(BC), Tapping screw  |          | 14 | 590-1B | NARF-3090-1b,      |       |
| A16      | 8384 | 88  | 3TTS+8B(BC), Tapping screw  | U2       |    | 591-1  | NADG-3091-1, D     |       |
| A17      | 8344 | 08  | 3TTS+10B(BC), Tapping screw | U3       | 14 | 592-1  | NADIS-3092-1, I    |       |
| A18      | 8314 | 88  | 3TTW+8B(BC), Tapping screw  | U4       | 14 | 593-1  | NASW-3093-1, O     |       |
| A19      | 8384 | 29  | 4TTB+12C(BC), Tapping screw | U5       | 14 | 594-1  | NASW-3094-1, P     |       |
| A20      | 8012 |     | 3STS+8BQ(BC), Tapping screw |          | 14 | 594-1A | NASW-3094-1a, 1    |       |
| A21      | 8641 | 0   | FWN4 × 10FN, Flange nut     |          |    |        | (G/W/Q/PX)         |       |
| A22      | 8311 | 88  | 3TTW+8B, Tapping screw      | U6       | 14 | 595-1  | NASW-3095-1, D     |       |
| A31      | 1A00 | 21  | Front panel ass'y           | U7       | 14 | 596-1  | NAETC-3096-1,      |       |
|          | 2813 | 4   | Badge                       | W901     | 25 | 597-1  | NAETC-3097-1,      |       |
| A33      | 2813 | 8B  | Back plate                  |          | 25 | 3,     | △ AS-UC-6#18, Po   |       |
| A34      | 2813 | 7A  | Dial plate                  |          | 25 | 6,     |                    |       |
| A35      | 2726 | 3   | Guide, dial plate           |          | 25 | 0 or   |                    |       |
| A36      | 2815 | 6A  | Clear plate                 |          | 25 | 6      |                    |       |
| A37      | 2815 | 8A  | Top cover                   |          | 25 | 7B or  | △ AS-CEE, Power s  |       |
| A38      | 2814 | 0   | Cushion                     |          | 25 | 9A     |                    |       |
| A39      | 2815 | 5   | Side panel L                |          | 25 | 8      | △ AS-SAA, Power s  |       |
|          | 2815 | 6   | Side panel R                |          |    |        |                    |       |

NOTE: (D) : C  
(G) : C  
(Q) : C  
(W) : C  
(PX) : C


E: THE COMPONENTS  
ARE CRITICAL FOR R  
SHOCK. REPLACE O  
SPECIFIED.

NTIFIE  
OF FIR  
( WITH

MARK  
ELECTRIC  
NUMBER

## CIRCUIT DESCRIPTIONS

### 1. Muting circuit

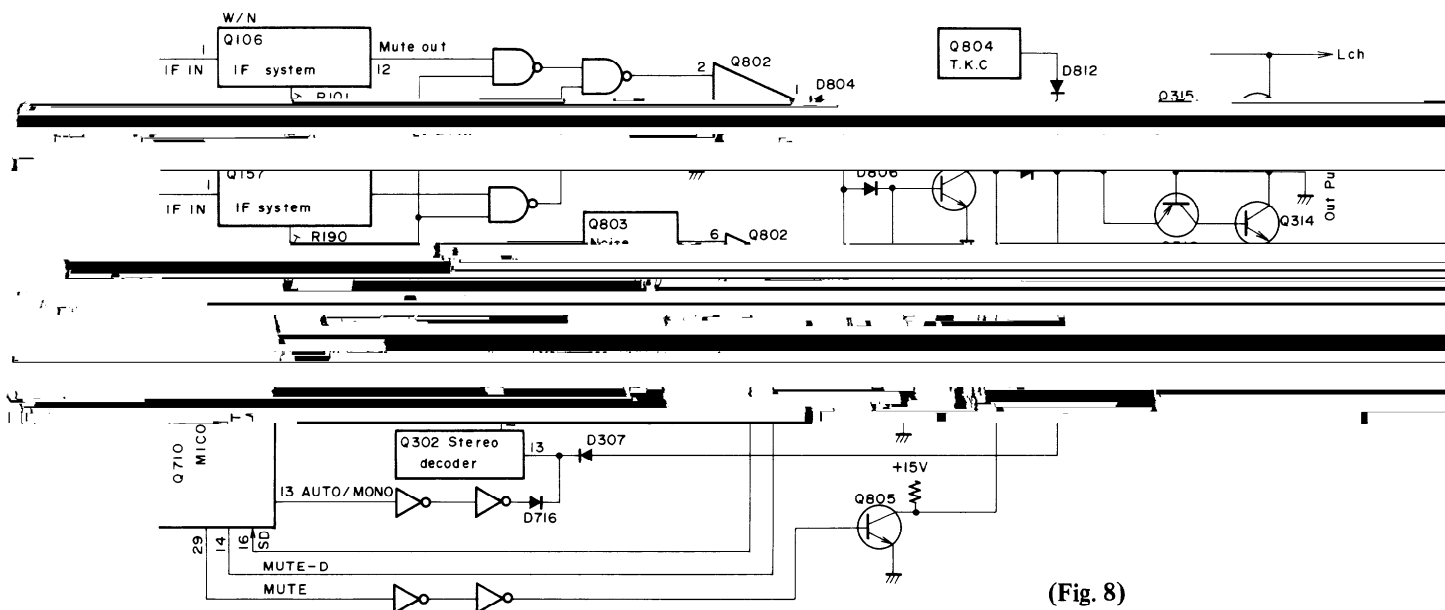


(Fig. 8)

In Q106 and Q157 FM IF system IC, the muting IF level (determined by pin 15 semi-fixed resistor) detector circuit and zero cross detector circuit are built in. At the time of tuning, this output at pin 12 becomes 0V. The Q715 NAND gate is the selector gate circuit for SUPER NARROW and WIDE/NARROW muting.


At the time of AUTO TUNING if a broadcast station is picked up, pin 12 of Q106 goes to low level and Pin 2 of Q802 goes low. Also, at the same time, when noise is not

included in the detected signal, pin 6 of Q802 goes low. Because of that, output pins 1 and 7 of Q802 have +12V, the anode side of D806 has +5V, pin 16 SD terminal of the Q710 microcomputer goes high, and the automatic tuning is completed. In addition, at the same time Q806 goes ON, Q313~Q316 are in cutoff state, and the signal is output. When the Q805 transistor muting switch is OFF (when the FM MUTE indicator is extinguished), the muting is forced to the open condition.

### 2. PLL detector circuit

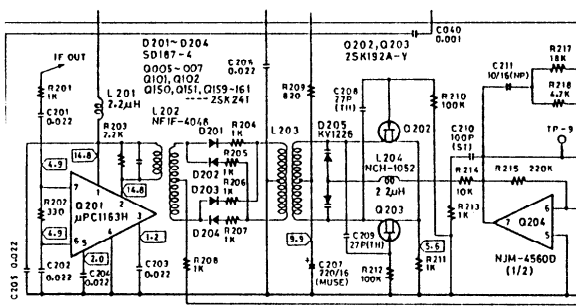

### 3. IF band selection circuit

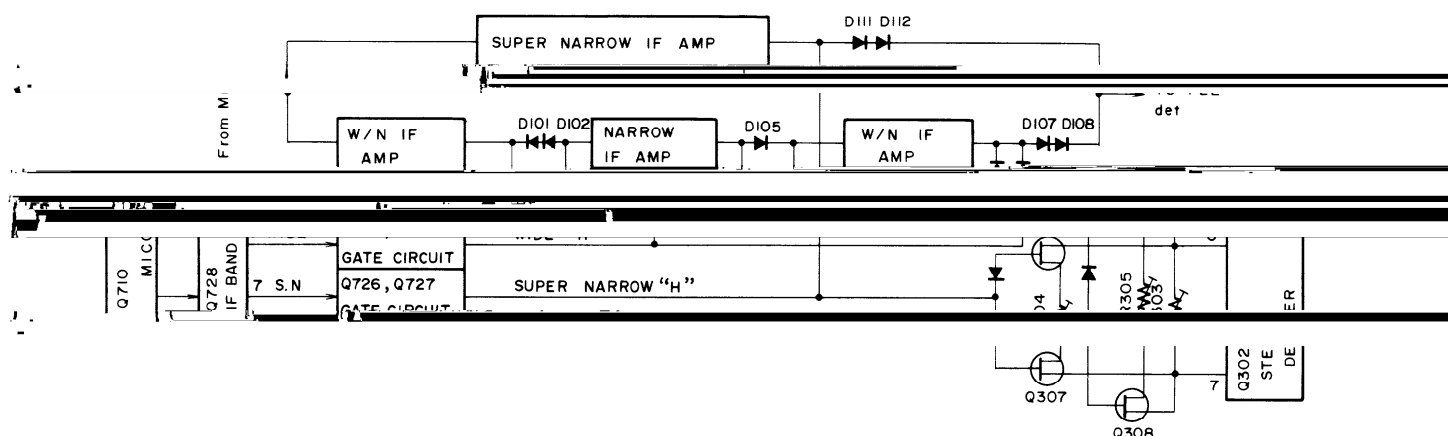

(Fig. 11)

At the A/D input signal pin 63 of Q710, when the SD terminal goes low, automatically the IF band is determined. At the time of NARROW selection, the output of pin 10 goes H, and at the time of SUPER NARROW, pin 11 goes H. In Q728, at the band selection switch, pins 1, 2, and 7 respectively go high for WIDE, NARROW, and SUPER NARROW.

#### – Wide operation –

Q722 and Q723 go ON, the collector voltage of Q723 becomes essentially +B2, D103, D104, and D106 go ON,

#### – Narrow operation –


Q724 and Q725 go ON, D102, D101, and D105 go ON, and the IF signal passes through NARROW amplifier Q104. Also, at the time of WIDE, in order to change to maximum operation, Q308 and Q310 are turned ON, and with R305, compensation of operation is carried out.

#### – Super Narrow operation –

Q726 and Q727 turn ON, D111 and D112 diodes go ON, and the signal passed through the super narrow IF amplifier is output in the PLL detector circuit. Also,

and separation is compensated by R304.

### 4. Stereo switch circuit

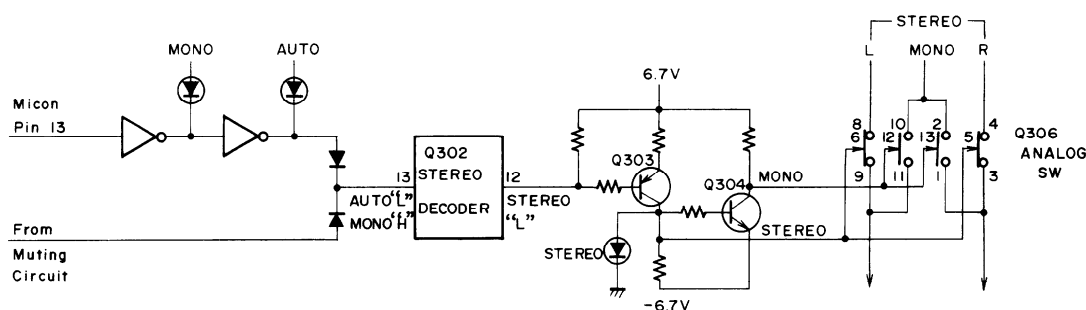

(Fig. 12)

When a stereo broadcast is received, pin 12 of Q302 goes "L", Q303 goes ON, the collector voltage becomes H,

Q306 analog switch go H, conduction occurs between 3~4 pins and 8~9 pins, and at the Q302 stereo decoder, the L and R divided signal is output. In addition, at the

time of monaural broadcast reception, and when the MODE switch is in the MONO position, pin 12 goes H,

pins 12 and 13 of Q306 go to high level, conduction takes place between pins 10~11 and 1~2, and the detected signal passes through the AF amplifier to be output.

## 5. Explanation of PLL synthesizer and controller IC


### 5-1. APR function (Automatic Precision Reception)

On the FM band, if there is a high level input at the SD terminal, depending upon the station signal level, there will be optimum reception function, and the output (Refer table 1) will automatically be changed.

| ANT | RF    | IF              | AUTO/MONO | HI-BLEND |
|-----|-------|-----------------|-----------|----------|
| A   | LOCAL | WIDE<br>NARROW  | AUTO      | OFF      |
| B   | DX    | SUPER<br>NARROW | MONO      | ON       |

Table 1 Changeover key means of APR execution.

### 5-2. Terminal connection

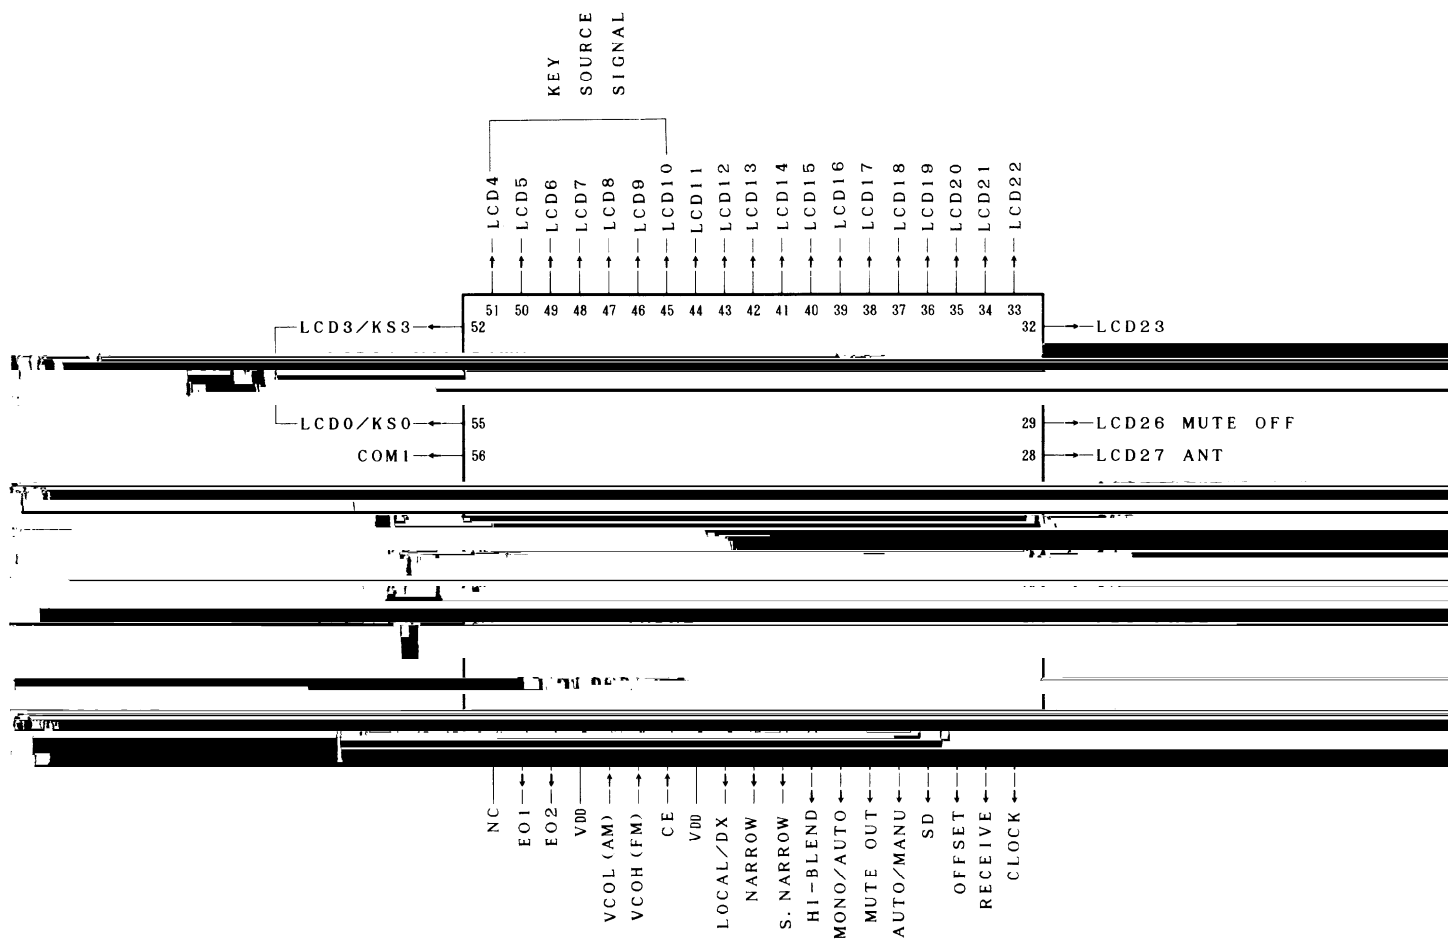

| Pin No. | Symbol    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1       | NC        | No connection.                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 2       | E01       | Charge pump output of the phase detector which constitutes the PLL. High level is output when the divided oscillation frequency is higher than the reference frequency. In the opposite case, Low level is output. Floating occurs when the frequencies match. The output is applied to the variable capacitor diode in the local oscillation circuit of FM through the low pass filter Q701, Q702 and Q703. The output from both terminals is the same, but only E01 is used. |
| 3       | E02       | Same as above.                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 4       | VDD       | This is the device power source terminal. At the time of operation, the supply is 5V. The internal data memory (RAM) is maintained by means of the C712 super capacitor.                                                                                                                                                                                                                                                                                                       |
| 5       | VCOL (AM) | AM local oscillation signal input terminal. Not used.                                                                                                                                                                                                                                                                                                                                                                                                                          |

| Pin No.              | Symbol                 | Description                                                                                                                                                                                                                                       |
|----------------------|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 6                    | VCOL (FM)              | At the FM local oscillation signal input terminal, there is direct input passage through the buffer.                                                                                                                                              |
| 7                    | CE                     | Chip enable input terminal. Device selection signal terminal.<br>Normal operation at the high level and Memory preservation at the low level.                                                                                                     |
| 8                    | VDD                    | Device power source terminal.                                                                                                                                                                                                                     |
| 9                    | LOCAL/DX               | This is the output terminal for RF, either Local or DX. It is "H" for DX.                                                                                                                                                                         |
| 10                   | NARROW                 | This is the output terminal for IF, either Narrow or Wide. It is "H" for Narrow.                                                                                                                                                                  |
| 11                   | SUPER NARROW           | This is the output terminal for IF, either Super Narrow or Wide. It is "H" for Super Narrow.                                                                                                                                                      |
| 12                   | HI-BLEND               | This terminal is for Hi-blend output ON or OFF. ON is "H".                                                                                                                                                                                        |
| 13                   | MONO/AUTO              | In the reception mode, the output terminal is either Auto or Mono. It is "H" for Mono.                                                                                                                                                            |
| 14                   | MUTE OUT               | The muting output terminal operates with the following modes.<br>Power source ON, MANUAL/AUTO UP/DOWN, PRESET MEMORY call out, ANTENNA, RF, IF, AUTO/MONO, at time of MUTING selection, when the PROGRAM DISPLAY key is pushed, AUTO MEMORY time. |
| 15                   | AUTO/MONO              | This is the output terminal for Auto or Manual in the tuning mode. It is "H" for Auto.                                                                                                                                                            |
| 16                   | SD                     | Station detection signal input terminal. "H" when active.                                                                                                                                                                                         |
| 17                   | OFFSET                 | Offset output terminal when the signal input level is large. "H" when active.                                                                                                                                                                     |
| 18                   | RECEIVE                | Indication output terminal when be received the code from remote control.                                                                                                                                                                         |
| 19                   | CLOCK                  | Clock signal output terminal to $\mu$ PD6320GC.                                                                                                                                                                                                   |
| 20                   | DATA                   | Data signal output terminal to $\mu$ PD6320GC.                                                                                                                                                                                                    |
| 21                   | LOAD1                  | Load signal output terminal to $\mu$ PD6320GC.                                                                                                                                                                                                    |
| 22                   | LOAD2                  | Load signal output terminal to $\mu$ PD6320GC.                                                                                                                                                                                                    |
| 23                   | PRESET                 | This is the output terminal for Shift indicator, either 1-10 or 11-20. 11-20 is "H".                                                                                                                                                              |
| 24                   | XO                     | Connect to the 4.5MHz crystal oscillator.                                                                                                                                                                                                         |
| 25                   | XI                     |                                                                                                                                                                                                                                                   |
| 26                   | GND                    | Ground terminal.                                                                                                                                                                                                                                  |
| 27                   | APR                    | APR indication terminal.                                                                                                                                                                                                                          |
| 28                   | ANT                    | This is the output terminal for ANT, either A or B. It is "H" for B.                                                                                                                                                                              |
| 29                   | LCD26/PL2              | This is the out terminal for Muting of weak input, either ON or OFF. It is "H" for OFF.                                                                                                                                                           |
| 30                   | VOL UP                 | Volume UP signal output terminal from remote control. Active high.                                                                                                                                                                                |
| 31                   | VOL DOWN               | Volume DOWN signal output terminal from remote control. Active high.                                                                                                                                                                              |
| 32-44                | LCD23-11               | No connection.                                                                                                                                                                                                                                    |
| 45-55                | LCD10/KS10<br>LCD0/KS0 | These are the output terminals for key return signal source. "H" when active.                                                                                                                                                                     |
| 56, 57               | COM1, COM2             | Not used.                                                                                                                                                                                                                                         |
| 58                   | GND                    | Ground terminal.                                                                                                                                                                                                                                  |
| 59<br>60<br>61<br>62 | K3<br>K2<br>K1<br>K0   | These are the input terminal for key return signal source and diode matrix.                                                                                                                                                                       |
| 63                   | SLEVEL                 |                                                                                                                                                                                                                                                   |
| 64                   | REMOTE                 |                                                                                                                                                                                                                                                   |
|                      |                        |                                                                                                                                                                                                                                                   |

### 5-3. Explanation of momentary key

| Input<br>Output |       | 59       | 60              | 61           | 62        |
|-----------------|-------|----------|-----------------|--------------|-----------|
|                 |       | K3       | K2              | K1           | K0        |
| 55              | LCD0  |          | PRESET SCAN     | AUTO MEMORY  | AUTO/MENU |
| 54              | LCD1  | HI-BLEND | AUTO/MONO       | IF           | RF        |
| 53              | LCD2  | ANT      | SIGNAL DISPLAY  | TUNING LEVEL | MEMORY    |
| 52              | LCD3  | M4/M14   | M3/M13          | M2/M12       | M1/M11    |
| 51              | LCD4  | M8/M18   | M7/M17          | M6/M16       | M5/M15    |
| 50              | LCD5  |          | PRESET REVERSE  | M10/M20      | M9/M19    |
| 49              | LCD6  | AM       | FM              | UP           | DOWN      |
| 48              | LCD7  |          | PROGRAM DISPLAY | APR          | PROGRAM   |
| 47              | LCD8  | REM10    | DISPLAY         | AM1          | AM0       |
| 46              | LCD9  | PRESET16 | FM ONLY         | FM1          | FM0       |
| 45              | LCD10 | SYSTEM   | ANTA            | ANTAPRD      | ANTMEMO   |

#### AUTO/MANUAL


Selector key for AUTO TUNING/MANUAL TUNING  
Causes reversal of AUTO/MANU.  
“H” when AUTO.

#### AUTO MEMORY

When the AUTO MEMORY key is pushed, “MEMORY” is displayed for 5 seconds, and during this, if the PRESET STATION key is pushed, AUTO SCANNING begins. The SD signal is above the tuning level preset from memory for that station.

At this time the APR data is also stored in memory. If the station key is pushed within 5 seconds, the memory display is cleared, and the condition for memory possibility is cancelled.

Example: A 90.10MHz signal is being received. The AUTO MEMORY key is pushed, and if within 5 seconds key M3 is pushed, continuous UP feed is carried out, and if a station is received, the M3 preset channel display is executed. If there is a 1 second stop, the UP operation starts again. In the manner shown below, the data is stored in memory for M4 and successive positions in sequence up to 108.00MHz, and when scanning is completed, at the final memory station call out, the automatic memory operation is completed.



At frequencies above 90.10MHz, when there are no broadcast stations, if the data of M2 is called out, the automatic memory operation stops. In the case of starting from M1, the lower limit frequency of 87.50MHz is called out and the operation stops.

#### PRESET SCAN

Every 5 seconds the preset memory data is received with a sawtooth mode in the up direction. At this time, the preset station display (FL tube and LED) blinks at 1Hz. If at that time there is preset reception, after the next preset, if there is no preset reception, scanning occurs from M1.

If, during the above operation, any key is pushed, the scan stops, and that key's operation is carried out. When the PRESET SCAN key is pushed, the operation is cancelled.

#### RF

With the RF selector key, the LOCAL/DX output can be reversed.

The level is “H” when in DX.

#### TUNING LEVEL – Tuning level selector key

When this key is pushed, after the display of about 1.5 seconds, the present tuning level (when RF=LOCAL, a value of 10dB) the display returns to the original value.

During the tuning level display, if the TUNING LEVEL key is pushed, the display will appear for about another 1.5 seconds. Also, during this display, the TUNING output goes “H”. During this interval, when another key is pushed, the display returns, and that key's operation is carried out.

#### UP/DOWN – Receiving channel UP/DOWN key

##### (I) Manual tuning mode

Each time the UP(DOWN) key is pushed, the frequency is raised (lowred) one step.

Also, if the key is pushed continuously for more

than 0.5 second, up to the time the key is released, continuous stepping will be carried out at about

about 50msec/step).

(II) Auto tuning mode

When the UP(DOWN) key is pushed, continuous feeding is carried out. At that time, APR functions, and the conditions required for AUTO TUNING

During scanning, if the same direction UP/DOWN key is pushed, the scanning continues, and when any other key is pushed, the scanning stops, and that key's operation is carried out.

**PROGRAM – Program mode setting key**

When the program mode is ON, at the time of power

out in sequence. (After M5, the sequence is repeated starting again with M1.)

**APR – APR execution key**


Each time this key is pushed, the APR is executed one time.

In the program mode, this key is used in order to confirm the next preset memory to be called out. Accordingly, this used only in the program mode.



If this key is pushed while in the program mode, the preset memory to be called will be called when CE next goes from "L" to "H".

# IC BLOCK DIAGRAM


$\mu$ PD6320GC (Indicator drive)

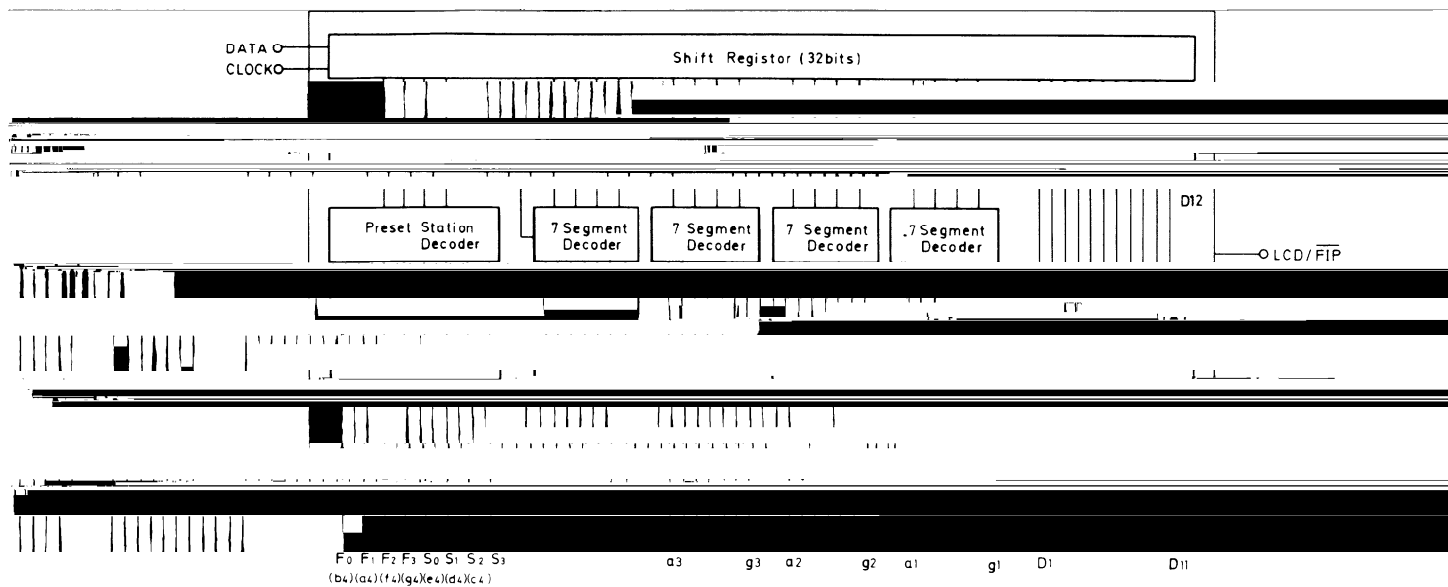


NJM4560D (Operation amplifier)

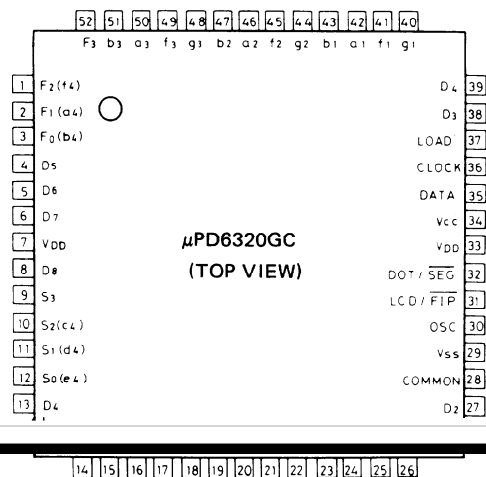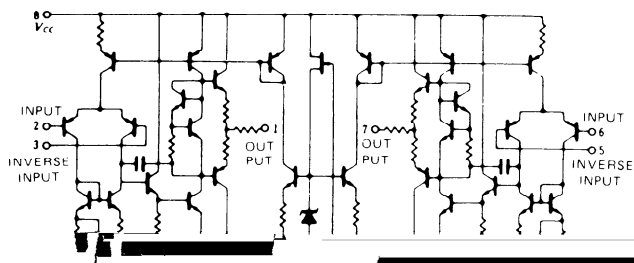

$\mu$ PA81C (Buffer/Inverter)

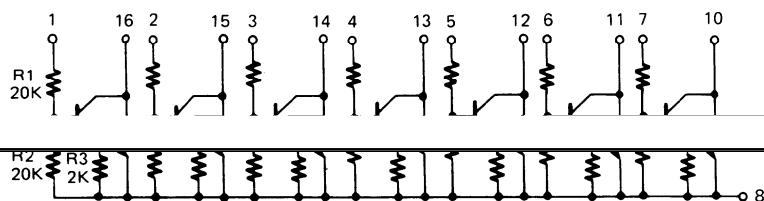

### LA1235 (FM IF system)


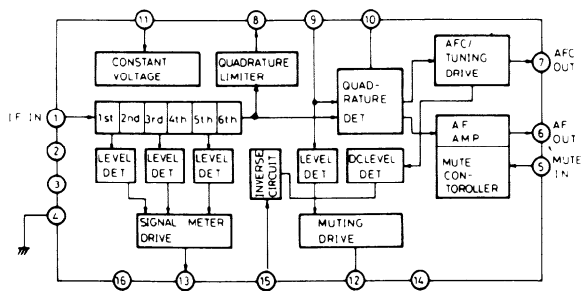


1. IF signal input
2. IF amplifier switch input  
H level: Off
5. Muting switch input
6. Composite signal output
7. AFC output
8. IF amplifier output
9. 10.7MHz input
10. Reference voltage
11. Power supply
12. Muting output  
Tuned: L level
13. Signal strength output
15. Muting level


### 4066B (Analog switch)

### 4011B (NAND gate)


**LOGIC DIAGRAM**

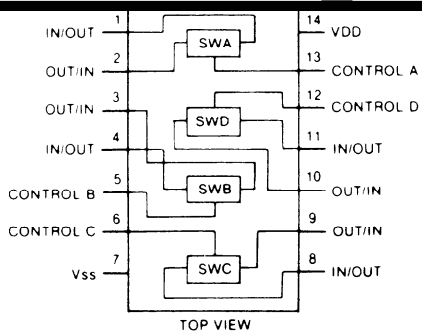

**CIRCUIT SCHEMATICS**  
(1/4 of Device Shown)

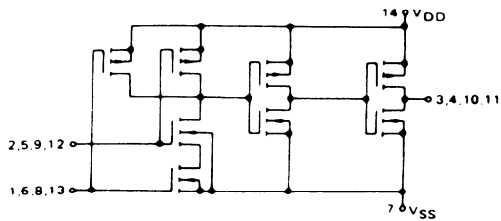


**$\mu$ PC1163H (RF amplifier)**

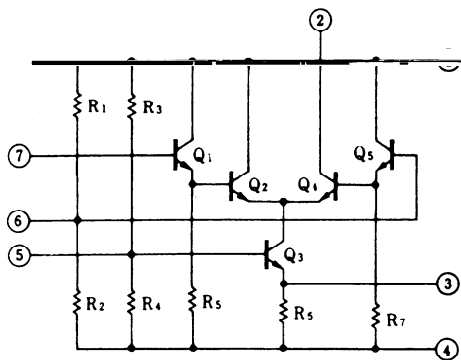

| Terminal No. | Operation       |
|--------------|-----------------|
| 1            | V <sub>cc</sub> |
| 2            | OUTPUT          |
| 3            | BYPASS          |
| 4            | GND             |
| 5            | BYPASS          |
| 6            | INPUT BIAS      |
| 7            | INPUT           |


$\mu$ PC1223C (Stereo decoder)

## Block diagram

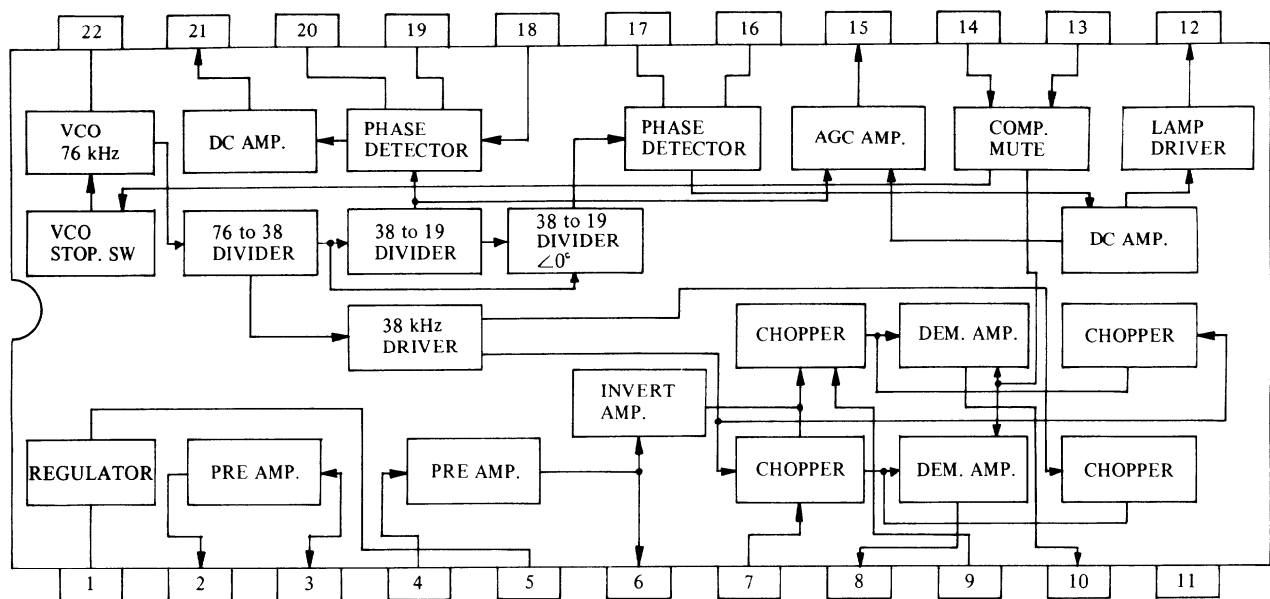

| Terminal No. | Connection        | Terminal No. | Connection            |
|--------------|-------------------|--------------|-----------------------|
| 1            | V <sub>cc</sub>   | 12           | ST. LAMP INDICATOR    |
| 2            | PRE AMP. OUTPUT 1 | 13           | ST-MONO SW & VCO STOP |
| 3            | PRE AMP. INPUT 1  | 14           | MUTING SWS            |
| 4            | PRE AMP. INPUT 2  | 15           | 19kHz CANCEL          |
| 5            | BYPASS            | 16           | LPF                   |
| 6            | PRE AMP. OUTPUT 2 | 17           | LPF                   |
| 7            | POST AMP. INPUT   | 18           | FILTER INPUT          |
| 8            | L-ch OUTPUT       | 19           | LPF                   |
| 9            | POST AMP. INPUT   | 20           | LPF                   |
| 10           | R-ch OUTPUT       | 21           | LPF                   |
| 11           | GND               | 22           | OSC RC NETWORK        |


LB1450 (Tuning indicator drive)

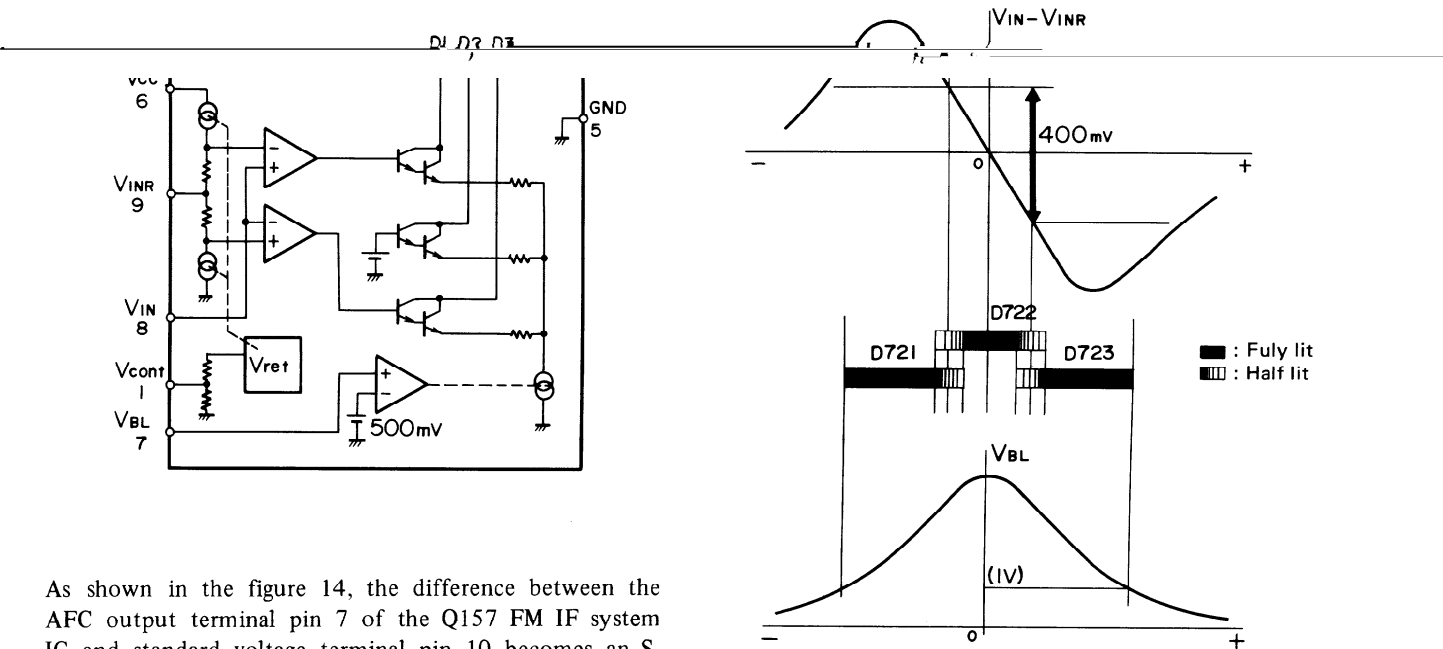

As shown in the figure 14, the difference between the AFC output terminal pin 7 of the Q157 FM IF system IC and standard voltage terminal pin 10 becomes an S-curve characteristic. Using this characteristic, the TUNING indicator is caused to light.

(Fig. 14)

LB1630 (Motor drive)

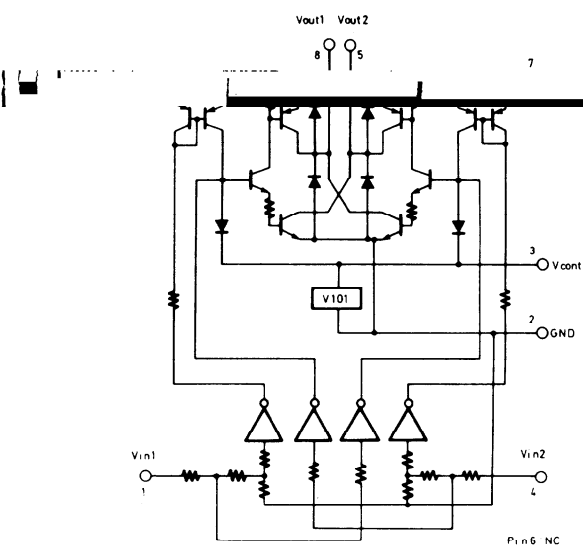

Truth Table

| V <sub>in1</sub> | V <sub>in2</sub> | V <sub>out1</sub> | V <sub>out2</sub> | Motor             |
|------------------|------------------|-------------------|-------------------|-------------------|
| H                | L                | H                 | L                 | Clockwise         |
| L                | H                | L                 | H                 | Counter-clockwise |
| H                | H                | OFF               | OFF               | Stop              |
| L                | L                | OFF               | OFF               | Stop              |


## LA7910 (Band switch)

Truth Table

| Input |       | Output |       |       |       |
|-------|-------|--------|-------|-------|-------|
| Pin 3 | Pin 4 | Pin 1  | Pin 2 | Pin 7 | Pin 8 |
| L     | L     | H      | Z     | Z     | Z     |
| H     | L     | Z      | H     | Z     | Z     |
| L     | H     | Z      | Z     | H     | Z     |
| H     | H     | Z      | Z     | Z     | H     |

1. Output terminal
2. Output terminal
3. Input terminal
4. Input terminal
5. Ground terminal
6. Vcc2
7. Output terminal
8. Output terminal
9. Vcc1

## FIP12AMW7S (Fluorescent indicator tube)

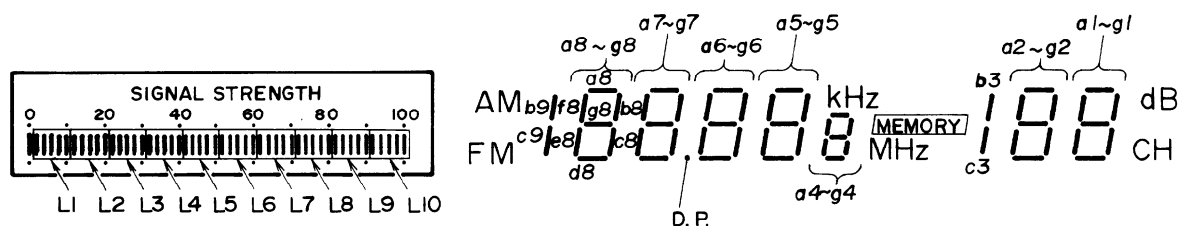Terminal connection  
(Lower)


| Terminal No. | 1  | 2  | 4  | 5  | 6  | 7  | 8              | 9        | 10       | 11 | 12 | 13 | 14 | 15 | 16 | 17 |
|--------------|----|----|----|----|----|----|----------------|----------|----------|----|----|----|----|----|----|----|
| Electrode    | F  | F  | G  | dB | CH | *Z | *FM            | b9<br>c9 | e8       | d8 | c8 | G  | e7 | d7 | c7 | c6 |
| Terminal No. | 18 | 19 | 30 | 31 | 32 | 33 | 34             | 35       | 36       | 37 | 38 | 39 | 40 | 41 | 42 | 43 |
| Electrode    | d6 | e6 | e5 | d5 | c5 | g4 | a4 c4<br>d4 f4 | b4<br>e4 | b3<br>c3 | G  | e2 | d2 | c2 | e1 | d1 | c1 |

## (Upper)


| Terminal No. | 50  | 51 | 53 | 54 | 55 | 56 | 57 | 58 | 59 | 60 | 61 | 62 | 63 | 64 | 65  | 66  |
|--------------|-----|----|----|----|----|----|----|----|----|----|----|----|----|----|-----|-----|
| Electrode    | F   | F  | G  | b1 | a1 | f1 | g1 | b2 | a2 | f2 | g2 | G  | b5 | a5 | f5  | g5  |
| Terminal No. | 67  | 68 | 69 | 70 | 71 | 72 | 73 | 74 | 75 | 76 | 77 | 78 | 79 | 80 | 81  | 82  |
| Electrode    | b6  | a6 | f6 | G  | g6 | b7 | a7 | f7 | g7 | b8 | a8 | G  | f8 | g8 | *AM | a11 |
| Terminal No. | 83  | 84 | 85 | 86 | 87 | 88 | 89 | 90 | 91 | 92 | 93 |    |    |    |     |     |
| Electrode    | L10 | L9 | L8 | G  | L7 | L6 | L5 | L4 | L3 | L2 | L1 |    |    |    |     |     |

F: Filament    G: Grid    Z: MEMORY    FM: FM, D. P., MHz    AM: AM, kHz


## BLOCK DIAGRAM

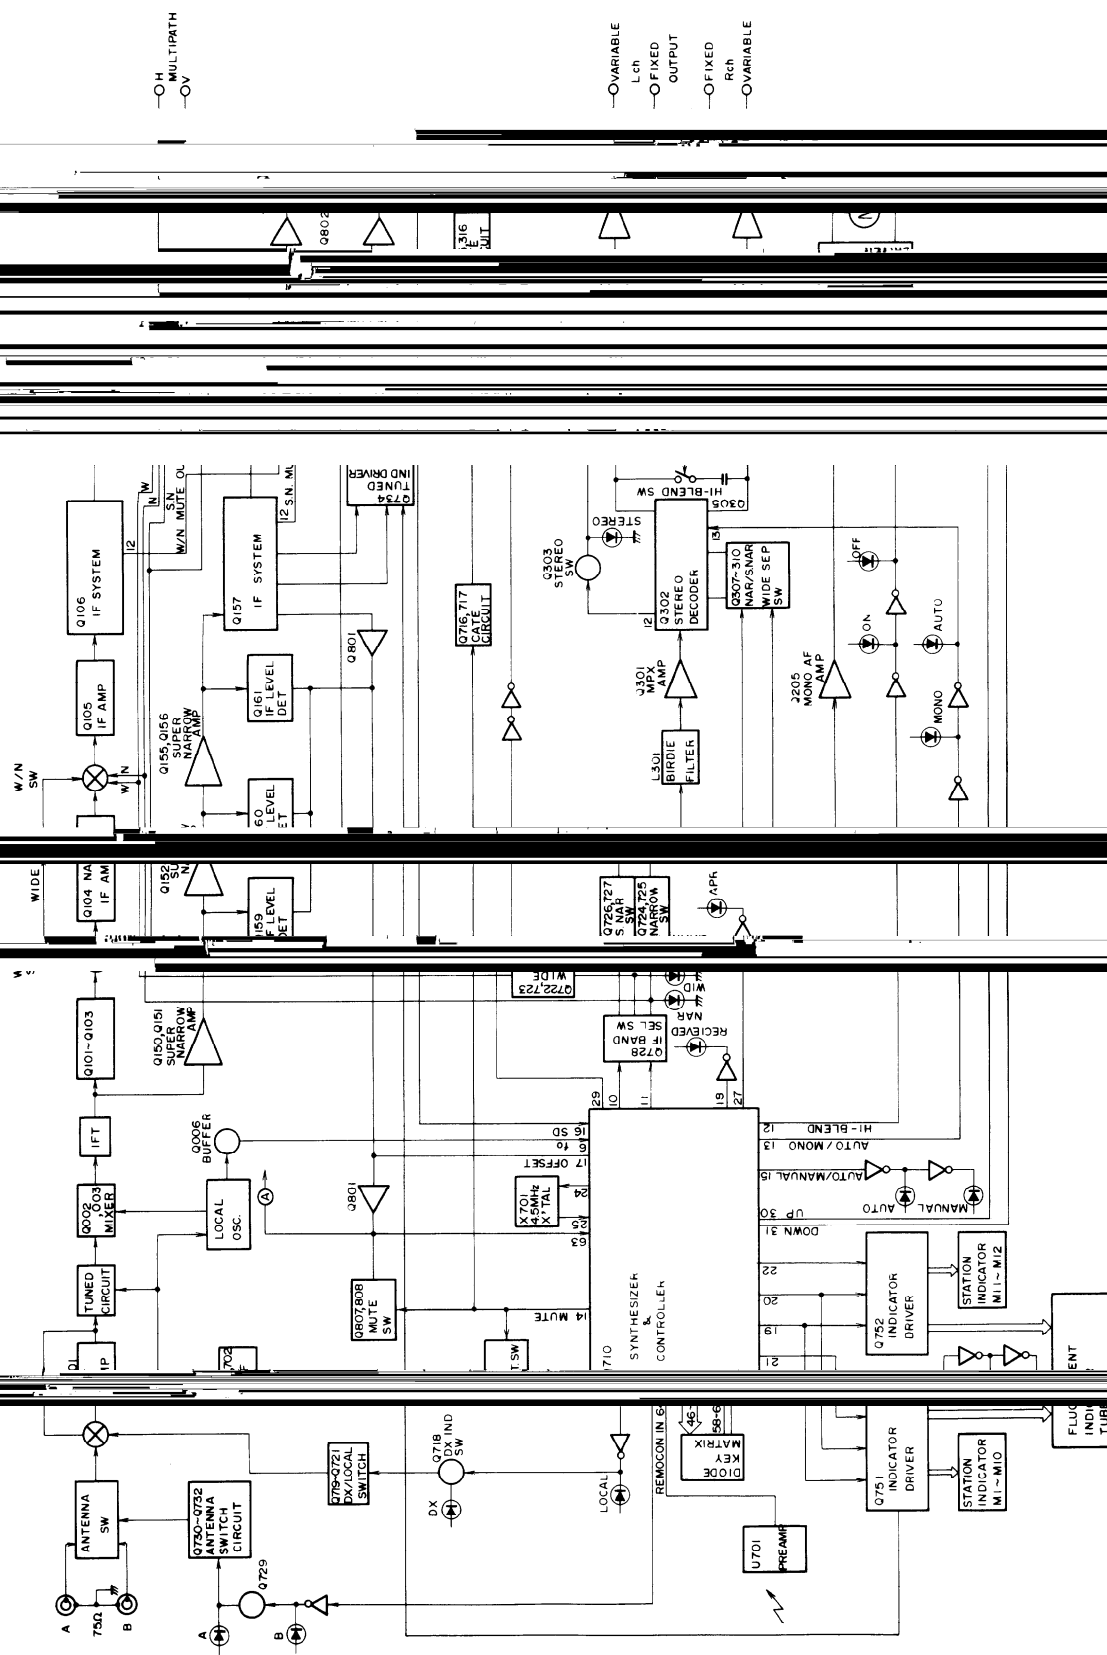


## ADJUSTMENT PROCEDURES

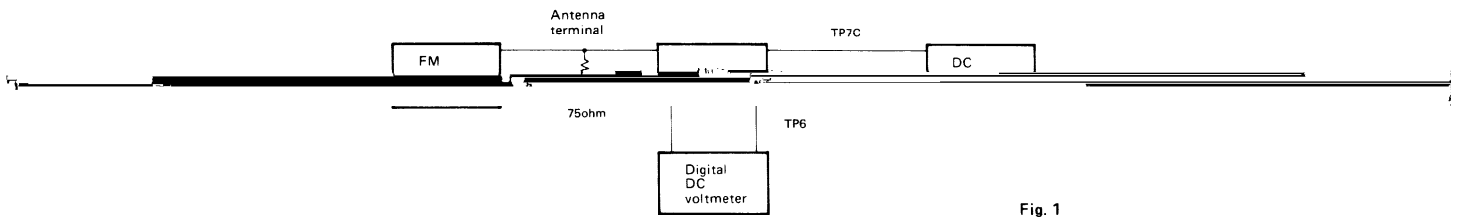


**Fig. 1**

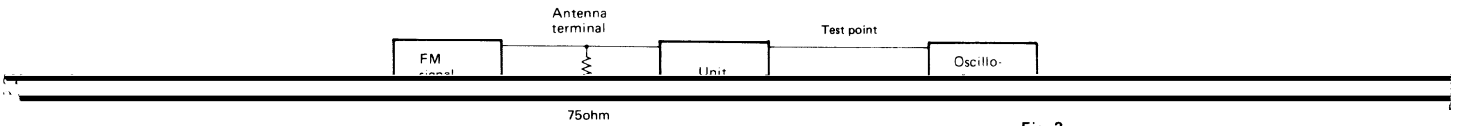


**Fig. 2**

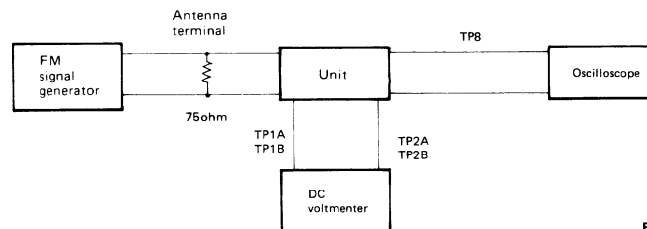

**Fig. 3**

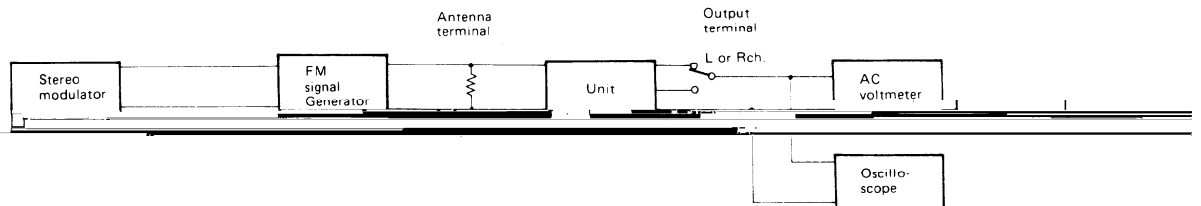

**Fig. 4**

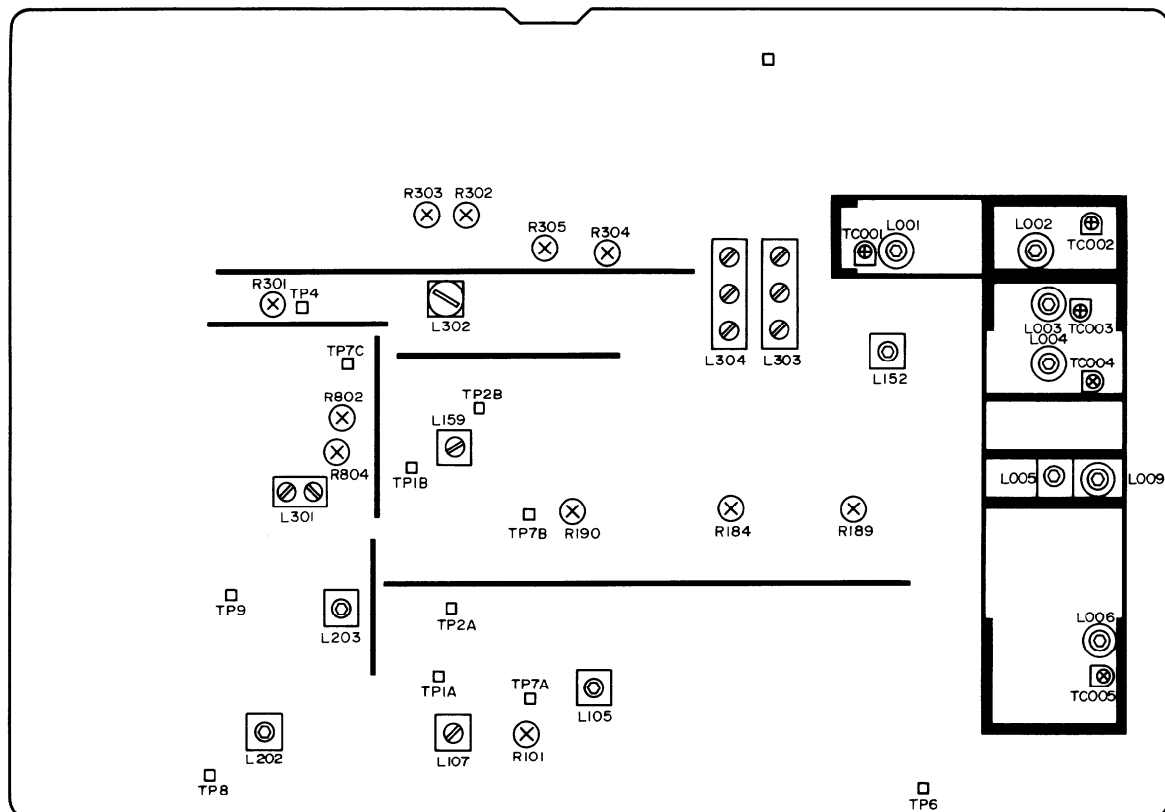


# PRINTED CIRCUIT BOARD-PARTS LIST

## MAIN CIRCUIT PC BOARD (NARF-3090-1/1A/1B)

| CIRCUIT NO. | PART NO.     | DESCRIPTION              | CIRCUIT NO. | PARTS NO.  | DESCRIPTION                      |
|-------------|--------------|--------------------------|-------------|------------|----------------------------------|
|             | ICS          |                          | D301-D307   | 223163     | 1SS133                           |
| Q103, Q104  | 222474       | μPC1163H, RF amp         | D801        | 223163     | 1SS133                           |
| Q106, Q157  | 222680       | LA1235, IF system        | D802        | 2239452 or | RD5. 1EB2 or                     |
| Q153-Q156   | 222474       | μPC1163H, RF amp         |             | 224650512  | HZ5. 1EB2                        |
| Q201, Q202  | 222579       | NJM4560D, Op amp         | D901        | 223862 or  | WL01 or                          |
| Q302        | 222732       | μPC1223C, Stereo decoder |             | 223890     | W01RL                            |
| Q306        | 222840661    | 4066B, Analog switch     | D902-D904   | 223880 or  | GP101N4003 or                    |
| Q311        | 222579       | NJM4560D, Op amp         |             | 223848     | GP08B                            |
| Q801, Q802  | 222579       | NJM4560D, Op amp         | D905, D906  | 2239532 or | RD7. 5EB2 or                     |
| Q901        | 222780151NEC | 78M15, Regulator         |             | 224650752  | HZ7. 5EB2                        |
|             | TRANSISTORS  |                          | D907        | 2239672 or | RD15EB2 or                       |
| Q001-Q003   | 2212514      | 3SK114-Y                 |             | 224651502  | HZ15EB2                          |
| Q004        | 2211723      | 2SC1923-0                | D908        | 2239812 or | RD30EB2 or                       |
| Q005-Q007   | 2212195      | 2SK241-GR                |             | 224653002  | HZ30EB2                          |
| Q101, Q102  | 2212195      | 2SK241-GR                |             |            |                                  |
| Q105        | 2212274      | 2SK192A-Y                |             |            |                                  |
| Q152        | 2212514      | 3SK114-Y                 | L001        | 233321     | NFA-3053                         |
| Q158, Q304  | 2211255 or   | 2SC1815-GR or            | L002        | 233322     | NFRF-3038                        |
|             | 2210746      | 2SC945A-P                | L003        | 233324     | NFRF-3040                        |
| Q159-Q161   | 2212195 or   | 2SK241-GR or             | L004        | 233323     | NFRF-3039                        |
|             | 2212194      | 2SK241-Y                 | L006        | 233325     | NFO-3033                         |
| Q202, Q203  | 2212274      | 2SK192A-Y                | L007, L008  | 233359     | NCH-2163                         |
| Q303        | 2211455 or   | 2SA1015-GR               | L009        | 233326     | NFRF-3041                        |
| Q305        | 2211945      | 2SK246-GR                | L101-L104   | 233359     | NCH-2163                         |
| Q307, Q310  | 2211945      | 2SK246-GR                | L105        | 233318     | NFIF-4052                        |
|             | 2211705      | 2SD655-E                 | L107        | 233378     | NFIF-4063                        |
| Q315, Q316  | 2211454      | 2SA1015-Y                | L151        | 233359     | NCH-2163                         |
| Q701        | 2212294      | 2SK108-D                 | L152        | 233318     | NFIF-4053                        |
| Q703        | 2211945      | 2SK246-GR                | L159        | 233378     | NFIF-4063                        |
| Q803        | 2211255      | 2SC1815-GR               | L160        | 233365     | NCH-2169                         |
| Q804        | 2211256      | 2SC1815-BL               | L201        | 233359     | NCH-2163                         |
| Q805, Q806  | 2211255      | 2SC1815-GR               | L202        | 233296     | NFIF-4048                        |
| Q807        | 2211945      | 2SK246-GR                | L203        | 233297     | NFIF-4049                        |
| Q808        | 2211255 or   | 2SC1815-GR or            | L204        | 233365     | NCH-2169                         |
| Q903        | 2211256      | 2SC1815-BL               | L801        | 233122     | NCH-3013                         |
| Q904        | 2211455 or   | 2SA1015-GR or            | L802        | 231081     | NCH-2129                         |
|             | 2210803      | 2SA733-P                 |             |            |                                  |
| Q905        | 2211255      | 2SC1815-GR               | L005        | 233317     | TRANSFORMER<br>NFIF-4052         |
|             | DIODES       |                          |             |            |                                  |
| D001-D005   | 223165       | BA282                    |             |            |                                  |
| D006        | 223154       | 1SV103                   | X101, X104  | 3010085    | CERAMIC FILTERS<br>SFE-10.7MXK-A |
| D007        | 223165       | BA282                    | X102        | 3010131    | SFE-10.7MX2K-A                   |
| D008        | 223163       | 1SS133                   | X103        | 3010085    | SFE-10.7MX2K-A                   |
| D011        | 223154       | 1SV103                   | X155        | 3010132    | SFE-10.7MJK-A                    |
| D012, D013  | 223149       | 1SS85                    |             |            |                                  |
| D014, D015  | 223154       | 1SV103                   |             |            |                                  |
| D016        | 223163       | 1SS133                   |             |            |                                  |
| D017-D019   | 223154       | 1SV103                   |             |            |                                  |
| D101-D112   | 223163       | 1SS133                   |             |            |                                  |
| D151        | 223165 or    | BA282 or                 |             |            |                                  |
|             | 223149       | 1SS85                    |             |            |                                  |
| D152-D157   | 223163       | 1SS133                   |             |            |                                  |
| D201-D204   | 223170       | SD187-4                  |             |            |                                  |
| D205        | 223136       | KV1226                   |             |            |                                  |


| CIRCUIT NO. | PART NO.  | DESCRIPTION                          | CIRCUIT NO. | PART NO.  | DESCRIPTION                    |
|-------------|-----------|--------------------------------------|-------------|-----------|--------------------------------|
| CAPACITORS  |           |                                      | RESISTORS   |           |                                |
| C032        | 391242217 | 220 $\mu$ F, 16V, Elect.             | R001, R002  | 431521055 | 1Mohm, 1/2W, Solid (D)         |
| C034        | 354780109 | 1 $\mu$ F, 50V, Elect.               | R101        | 5210064   | N06HR10KBD, Semi-fixed         |
| C038        | 379121034 | 0.01 $\mu$ F $\pm$ 5%, 50V, Plastic  | R184        | 5210066   | N06HR22KBD, Semi-fixed         |
| TC001-TC004 | 3060020   | NTC-2P17, Trimmer                    | R189, R190  | 5210064   | N06HR10KBD, Semi-fixed         |
| TC005       | 3060017   | NTC-10P15, Trimmer                   | R301        | 5210064   | N06HR10KBD, Semi-fixed         |
| C103        | 354741019 | 100 $\mu$ F, 16V, Elect.             | R302, R303  | 5210074   | N06HR470KBD, Semi-fixed        |
| C116        | 391242217 | 220 $\mu$ F, 16V, Elect.             | R304, R305  | 5210072   | N06HR220KBD, Semi-fixed        |
| C122        | 354780229 | 2.2 $\mu$ F, 50V, Elect.             | R802        | 5210066   | N06HR22KBD, Semi-fixed         |
| C126        | 354742219 | 220 $\mu$ F, 16V, Elect.             | R804        | 5210072   | N06HR220KBD, Semi-fixed        |
| C132        | 354780109 | 1 $\mu$ F, 50V, Elect.               | R903        | 441626814 | 680ohm, 1W, Metal oxide film   |
| C134        | 354741019 | 100 $\mu$ F, 16V, Elect.             | R904        | 441720624 | 6.2ohm, 2W, Metal oxide film   |
| C136, C137  | 379122225 | 2, 200 $\pm$ 10%, 50V, Plastic       | R908        | 442521014 | 100ohm, 1/2W, Metal oxide film |
| C160        | 391242217 | 220 $\mu$ F, 16V, Elect.             | R911        | 442520104 | 1ohm, 1/2W, Metal oxide film   |
| C177        | 354780229 | 2.2 $\mu$ F, 50V, Elect.             | THERMISTORS |           |                                |
| C180        | 354741019 | 100 $\mu$ F, 16V, Elect.             | R158        | 4000102   | TD5-C410D                      |
| C186        | 354780109 | 1 $\mu$ F, 50V, Elect.               | R192, R841  | 4000099   | TD5-C230D                      |
| C207        | 391242217 | 220 $\mu$ F, 16V, Elect.             | TERMINALS   |           |                                |
| C210        | 372121014 | 100pF $\pm$ 5%, 50V, Styrene         | P902        | 25045202  | NPJ-4PDBL83, Output            |
| C211        | 352941006 | 10 $\mu$ F, 16V, Non-polar Elect.    | P903        | 25045182  | NPJ-2PDBL72, Multipath         |
| C212        | 379122224 | 2,200pF $\pm$ 5%, 50V, Plastic(D)    | SOCKETS     |           |                                |
|             | 379121524 | 1,500pF $\pm$ 5%, 50V, Plastic(G/W)  | P001, P004  | 25050272  | NSCT-8P100                     |
| C213        | 391241017 | 100 $\mu$ F, 16V, Elect.             | P002        | 25050268  | NSCT-4P96                      |
| C251        | 379121024 | 1,000pF $\pm$ 5%, 50V, Plastic(W)    | P003        | 25050267  | NSCT-3P95                      |
| C301        | 391244717 | 470 $\mu$ F, 16V, Elect.             | JL015       | 25050270  | NSCT-6P98                      |
| C302        | 379124734 | 0.047 $\mu$ F $\pm$ 5%, 50V, Plastic | P021        | 25050267  | NSCT-4P96 (W)                  |
| C303        | 391244717 | 470 $\mu$ F, 16V, Elect.             |             | 25050267  | NSCT-3P95 (W)                  |
| C304        | 379124724 | 4,700pF $\pm$ 5%, 50V, Plastic       | CABLES      |           |                                |
| C305, C306  | 379122224 | 2,200pF $\pm$ 5%, 50V, Plastic       | 2010102     |           | Antenna                        |
|             | 379121524 | 1,500pF $\pm$ 5%, 50V, Plastic(G/W)  | RADIATOR    |           |                                |
| C307        | 379123334 | 0.033 $\mu$ F $\pm$ 5%, 50V, Plastic | 27160221    |           | RAD-74                         |
| C308        | 354741009 | 10 $\mu$ F, 16V, Elect.              | SHIELD CASE |           |                                |
| C309        | 370138214 | 820pF $\pm$ 5%, 100V, APS            | 27301031A   |           | Tuned/Local osc circuit        |
| C310        | 354784799 | 0.47 $\mu$ F, 50V, Elect.            | 27301032A   |           | Center                         |
| C311        | 354750479 | 4.7 $\mu$ F, 25V, Elect.             | 27301033A   |           | RF circuit                     |
| C312        | 379122724 | 2,700pF $\pm$ 5%, 50V, Plastic       | BUSSES      |           |                                |
| C313        | 370133914 | 390pF $\pm$ 5%, 100V, APS            | 27160213    |           | Large                          |
| C315, C316  | 391242207 | 22 $\mu$ F, 16V, Elect.              | 27160214    |           | Middle                         |
| C317, C318  | 352942206 | 22 $\mu$ F, 16V, Non-polar elect.    | 27160215    |           | Small                          |
| C319, C320  | 379121224 | 1,200pF $\pm$ 5%, 50V, Plastic       |             |           |                                |
| C321, C322  | 391244717 | 470 $\mu$ F, 16V, Elect.             |             |           |                                |
| C351, C352  | 379121024 | 1,000pF $\pm$ 5%, 50V, Plastic(W)    |             |           |                                |
| C701        | 391281017 | 100 $\mu$ F, 50V, Elect.             |             |           |                                |
| C702        | 395160227 | 2.2 $\mu$ F, 35V, Tantal             |             |           |                                |
| C703        | 379121034 | 0.01 $\mu$ F $\pm$ 5%, 50V, Plastic  |             |           |                                |
| C803-C805   | 354784799 | 0.47 $\mu$ F, 50V, Elect.            |             |           |                                |
| C807        | 354742209 | 22 $\mu$ F, 16V, Elect.              |             |           |                                |
| C808        | 354754719 | 470 $\mu$ F, 25V, Elect.             |             |           |                                |
| C810        | 354781099 | 0.1 $\mu$ F, 50V, Elect.             |             |           |                                |
| C811        | 354742209 | 22 $\mu$ F, 16V, Elect.              |             |           |                                |
| C814        | 354754719 | 470 $\mu$ F, 25V, Elect.             |             |           |                                |
| C902, C903  | 379122234 | 0.022 $\mu$ F $\pm$ 5%, 50V, Plastic |             |           |                                |
| C904-C906   | 335251039 | 0.01 $\mu$ F, 500V, Ceramic          |             |           |                                |
| C907        | 354762229 | 2,200 $\mu$ F, 35V, Elect.           |             |           |                                |
| C908        | 354761009 | 10 $\mu$ F, 35V, Elect.              |             |           |                                |
| C909        | 354753319 | 330 $\mu$ F, 25V, Elect.             |             |           |                                |
| C910        | 379121034 | 0.01 $\mu$ F $\pm$ 5%, 50V, Plastic  |             |           |                                |
| C911        | 391242217 | 220 $\mu$ F, 16V, Elect.             |             |           |                                |
| C915        | 354781009 | 10 $\mu$ F, 50V, Elect.              |             |           |                                |
| C914, C915  | 35474101  | 100 $\mu$ F, 16V, Elect.             |             |           |                                |
| C916        | 354764719 | 470 $\mu$ F, 35V, Elect.             |             |           |                                |
| C917        | 354741019 | 100 $\mu$ F, 16V, Elect.             |             |           |                                |
| C918        | 391242217 | 220 $\mu$ F, 16V, Elect.             |             |           |                                |
| C920        | 354784719 | 470 $\mu$ F, 50V, Elect.             |             |           |                                |
| C921, C922  | 354741009 | 10 $\mu$ F, 16V, Elect.              |             |           |                                |
| C923, C924  | 335251039 | 0.01 $\mu$ F, 500V, Ceramic          |             |           |                                |

### SCHEMATIC DIAGRAM

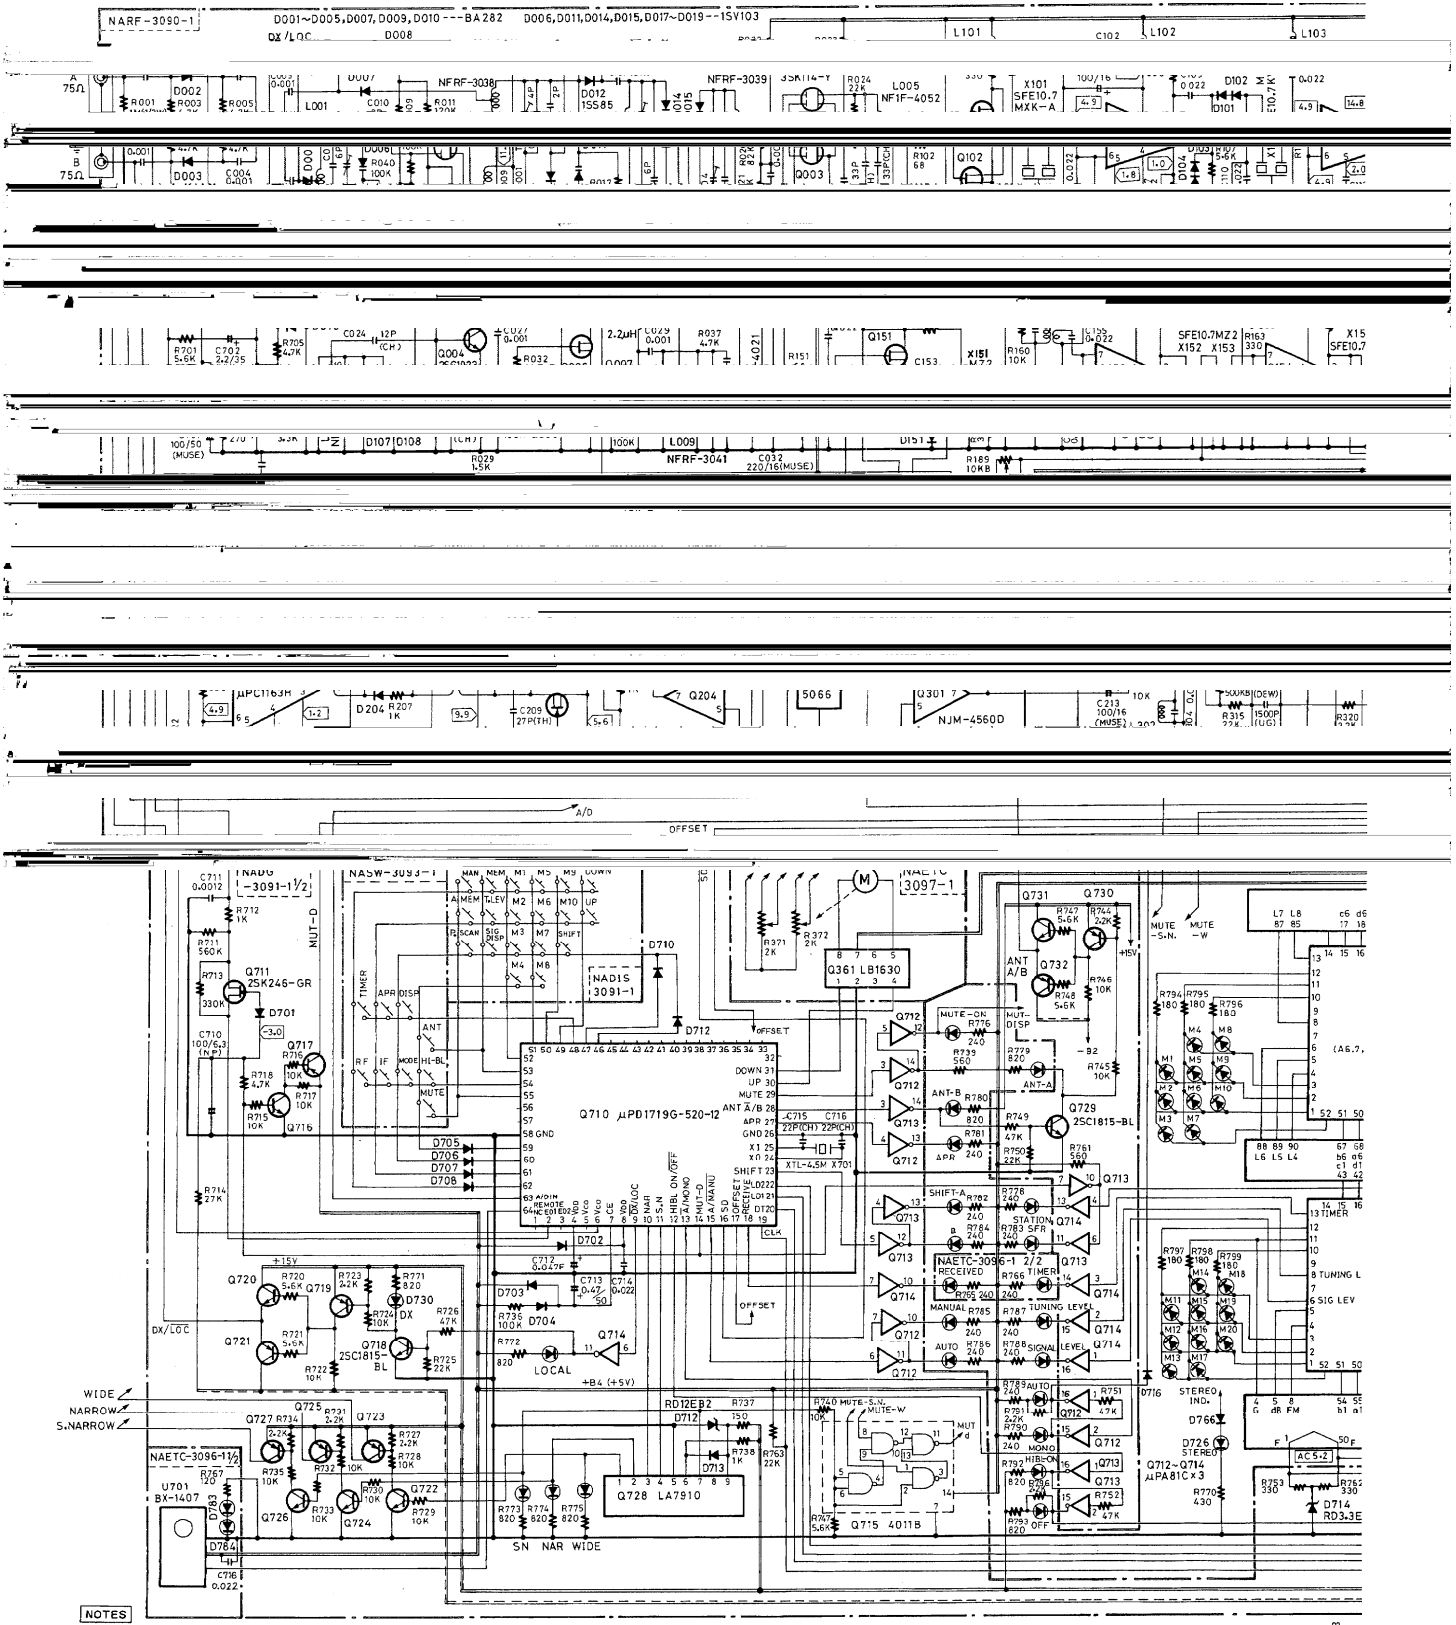

- ALL RESISTORS ARE IN OHMS 1/4 WATTS UNLESS OTHERWISE NOTED.
- ALL DIODES ARE 1S2473, 1S2078, 1S1040 or 1S5133 UNLESS OTHERWISE NOTED.
- CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

D734, 730, 736, 701, 782, 784, 786, 788, 790, 792, 794, 796, 798, 800, 802, 804, 806, 808, 810, 812, 814, 816, 818, 820, 822, 824, 826, 828, 830, 832, 834, 836, 838, 840, 842, 844, 846, 848, 850, 852, 854, 856, 858, 860, 862, 864, 866, 868, 870, 872, 874, 876, 878, 880, 882, 884, 886, 888, 890, 892, 894, 896, 898, 900, 902, 904, 906, 908, 910, 912, 914, 916, 918, 920, 922, 924, 926, 928, 930, 932, 934, 936, 938, 940, 942, 944, 946, 948, 950, 952, 954, 956, 958, 960, 962, 964, 966, 968, 970, 972, 974, 976, 978, 980, 982, 984, 986, 988, 990, 992, 994, 996, 998, 1000, 1002, 1004, 1006, 1008, 1010, 1012, 1014, 1016, 1018, 1020, 1022, 1024, 1026, 1028, 1030, 1032, 1034, 1036, 1038, 1040, 1042, 1044, 1046, 1048, 1050, 1052, 1054, 1056, 1058, 1060, 1062, 1064, 1066, 1068, 1070, 1072, 1074, 1076, 1078, 1080, 1082, 1084, 1086, 1088, 1090, 1092, 1094, 1096, 1098, 1100, 1102, 1104, 1106, 1108, 1110, 1112, 1114, 1116, 1118, 1120, 1122, 1124, 1126, 1128, 1130, 1132, 1134, 1136, 1138, 1140, 1142, 1144, 1146, 1148, 1150, 1152, 1154, 1156, 1158, 1160, 1162, 1164, 1166, 1168, 1170, 1172, 1174, 1176, 1178, 1180, 1182, 1184, 1186, 1188, 1190, 1192, 1194, 1196, 1198, 1200, 1202, 1204, 1206, 1208, 1210, 1212, 1214, 1216, 1218, 1220, 1222, 1224, 1226, 1228, 1230, 1232, 1234, 1236, 1238, 1240, 1242, 1244, 1246, 1248, 1250, 1252, 1254, 1256, 1258, 1260, 1262, 1264, 1266, 1268, 1270, 1272, 1274, 1276, 1278, 1280, 1282, 1284, 1286, 1288, 1290, 1292, 1294, 1296, 1298, 1300, 1302, 1304, 1306, 1308, 1310, 1312, 1314, 1316, 1318, 1320, 1322, 1324, 1326, 1328, 1330, 1332, 1334, 1336, 1338, 1340, 1342, 1344, 1346, 1348, 1350, 1352, 1354, 1356, 1358, 1360, 1362, 1364, 1366, 1368, 1370, 1372, 1374, 1376, 1378, 1380, 1382, 1384, 1386, 1388, 1390, 1392, 1394, 1396, 1398, 1400, 1402, 1404, 1406, 1408, 1410, 1412, 1414, 1416, 1418, 1420, 1422, 1424, 1426, 1428, 1430, 1432, 1434, 1436, 1438, 1440, 1442, 1444, 1446, 1448, 1450, 1452, 1454, 1456, 1458, 1460, 1462, 1464, 1466, 1468, 1470, 1472, 1474, 1476, 1478, 1480, 1482, 1484, 1486, 1488, 1490, 1492, 1494, 1496, 1498, 1500, 1502, 1504, 1506, 1508, 1510, 1512, 1514, 1516, 1518, 1520, 1522, 1524, 1526, 1528, 1530, 1532, 1534, 1536, 1538, 1540, 1542, 1544, 1546, 1548, 1550, 1552, 1554, 1556, 1558, 1560, 1562, 1564, 1566, 1568, 1570, 1572, 1574, 1576, 1578, 1580, 1582, 1584, 1586, 1588, 1590, 1592, 1594, 1596, 1598, 1600, 1602, 1604, 1606, 1608, 1610, 1612, 1614, 1616, 1618, 1620, 1622, 1624, 1626, 1628, 1630, 1632, 1634, 1636, 1638, 1640, 1642, 1644, 1646, 1648, 1650, 1652, 1654, 1656, 1658, 1660, 1662, 1664, 1666, 1668, 1670, 1672, 1674, 1676, 1678, 1680, 1682, 1684, 1686, 1688, 1690, 1692, 1694, 1696, 1698, 1700, 1702, 1704, 1706, 1708, 1710, 1712, 1714, 1716, 1718, 1720, 1722, 1724, 1726, 1728, 1730, 1732, 1734, 1736, 1738, 1740, 1742, 1744, 1746, 1748, 1750, 1752, 1754, 1756, 1758, 1760, 1762, 1764, 1766, 1768, 1770, 1772, 1774, 1776, 1778, 1780, 1782, 1784, 1786, 1788, 1790, 1792, 1794, 1796, 1798, 1800, 1802, 1804, 1806, 1808, 1810, 1812, 1814, 1816, 1818, 1820, 1822, 1824, 1826, 1828, 1830, 1832, 1834, 1836, 1838, 1840, 1842, 1844, 1846, 1848, 1850, 1852, 1854, 1856, 1858, 1860, 1862, 1864, 1866, 1868, 1870, 1872, 1874, 1876, 1878, 1880, 1882, 1884, 1886, 1888, 1890, 1892, 1894, 1896, 1898, 1900, 1902, 1904, 1906, 1908, 1910, 1912, 1914, 1916, 1918, 1920, 1922, 1924, 1926, 1928, 1930, 1932, 1934, 1936, 1938, 1940, 1942, 1944, 1946, 1948, 1950, 1952, 1954, 1956, 1958, 1960, 1962, 1964, 1966, 1968, 1970, 1972, 1974, 1976, 1978, 1980, 1982, 1984, 1986, 1988, 1990, 1992, 1994, 1996, 1998, 2000, 2002, 2004, 2006, 2008, 2010, 2012, 2014, 2016, 2018, 2020, 2022, 2024, 2026, 2028, 2030, 2032, 2034, 2036, 2038, 2040, 2042, 2044, 2046, 2048, 2050, 2052, 2054, 2056, 2058, 2060, 2062, 2064, 2066, 2068, 2070, 2072, 2074, 2076, 2078, 2080, 2082, 2084, 2086, 2088, 2090, 2092, 2094, 2096, 2098, 2100, 2102, 2104, 2106, 2108, 2110, 2112, 2114, 2116, 2118, 2120, 2122, 2124, 2126, 2128, 2130, 2132, 2134, 2136, 2138, 2140, 2142, 2144, 2146, 2148, 2150, 2152, 2154, 2156, 2158, 2160, 2162, 2164, 2166, 2168, 2170, 2172, 2174

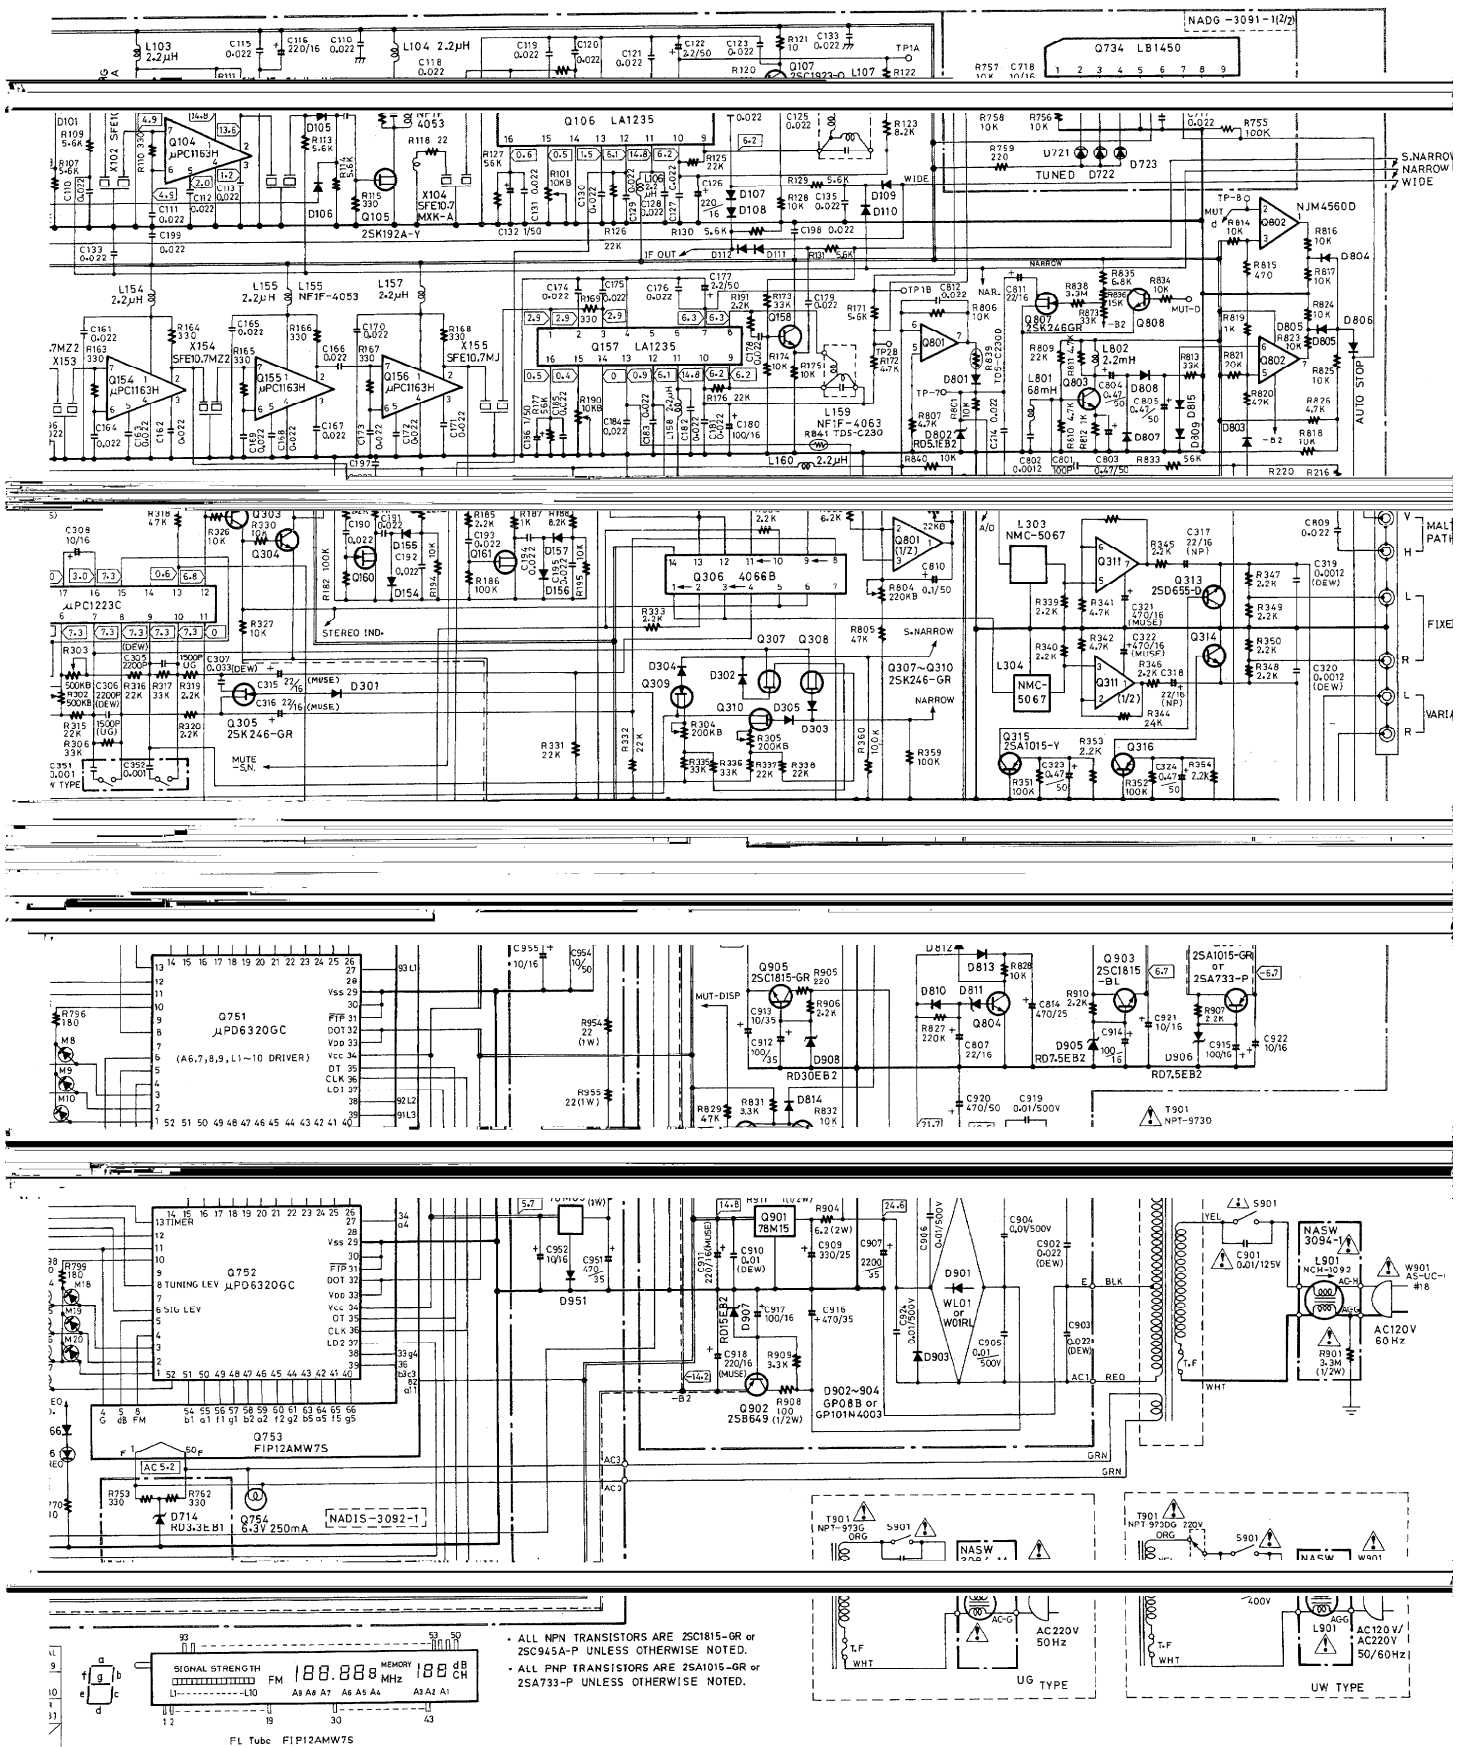

## PRINTED CIRCUIT BOARD-PARTS LIST

### DIGITAL CIRCUIT PC BOARD (NADG-3091-1)






| CIRCUIT NO. | PART NO.    | DESCRIPTION                    | CIRCUIT NO. | PART NO.   | DESCRIPTION                         |
|-------------|-------------|--------------------------------|-------------|------------|-------------------------------------|
|             | ICS         |                                |             | DIODES     |                                     |
| Q710        | 22240106    | $\mu$ PD1719G-520-12, Micon    | D701-D709   | 223163     | 1SS133                              |
| Q712-Q714   | 222807      | $\mu$ PA81C, Buffer            | D711, D714  | 223163     | 1SS133                              |
| Q715        | 222840111   | 4011B, NAND gate               | D713        | 2239632 or | RD12EB2 or                          |
| Q728        | 222992      | LA7910, Band switch            |             | 224651202  | HZ12EB2                             |
| Q733        | 22240107    | LB1450, Tuning indicator drive | D715        | 2241291    | RD3.3EB1                            |
| Q951        | 222780052   | 78M05, Regulator               | D716, D717  | 223163     | 1SS133                              |
| Q952        | 222780055   | 78M05HF, Regulator             | D951        | 223163     | 1SS133                              |
|             | TRANSISTORS |                                |             | X'TAL      |                                     |
| Q711        | 2211945     | 2SK246-GR                      | X701        | 3010091    | XTL-4.5M                            |
| Q716, Q718  | 2211255 or  | 2SC1815-GR or                  |             | CAPACITORS |                                     |
| Q720, Q722  | 2210746     | 2SC945A-P                      | C710        | 352921016  | 100 $\mu$ F, 6.3V, Non-polar elect. |
| Q724, Q726  | 2211255 or  | 2SC1815-GR or                  | C711        | 371121225  | 1,200pF $\pm$ 10%, 50V, Mylar       |
| Q729, Q731  | 2210746     | 2SC945A-P                      | C712        | 3020027,   | 0.047F, 5V                          |
| Q717, Q719  | 2211455 or  | 2SA1015-GR or                  |             | 3000051 or | 0.047F, 5.5V or                     |
| Q721, Q723  | 2210803     | 2SA733-P                       |             | 3000050    | 0.047F, 5.5V, Super                 |
| Q725, Q727  | 2211455 or  | 2SA1015-GR or                  | C713        | 354784799  | 0.47 $\mu$ F, 50V, Elect.           |
| Q730, Q732  | 2210803     | 2SA733-P                       | C718        | 354741009  | 10 $\mu$ F, 16V, Elect.             |

| CIRCUIT NO. | PART NO.  | DESCRIPTION                 |
|-------------|-----------|-----------------------------|
| C951        | 354764719 | 470 $\mu$ F, 35V, Elect.    |
| C952, C955  | 354741009 | 10 $\mu$ F, 16V, Elect.     |
| C954        | 354781009 | 10 $\mu$ F, 50V, Elect.     |
|             | RESISTORS |                             |
| R951, R952  | 441622204 | 22ohm, 1W, Metal oxide film |
| R954, R955  |           |                             |
|             | RADIATOR  |                             |
|             | 27160209  | RAD-67                      |

## DISPLAY CIRCUIT PC BOARD (NADG-3092-1)

| CIRCUIT NO. | PART NO.         | DESCRIPTION    |
|-------------|------------------|----------------|
|             | ICS              |                |
| Q751, Q752  | 2227701          | $\mu$ PD6320GC |
|             | FLUORESCENT TUBE |                |
| Q753        | 212048           | FIP12AMW7S     |
|             | LAMP             |                |
| Q754        | 210064A          | PL6.3V, 250mA  |

| CIRCUIT NO. | PART NO.    | DESCRIPTION   |
|-------------|-------------|---------------|
|             | L.E.DS      |               |
| D721-D724   | 225137CG,   | SEL2413ECG,   |
| D727, D728  | 225137DG or | SEL2413EDG or |
| D730, D731  | 225137DY    | SEL2413EDY    |
| D733, D735  | 225137CG,   | SEL2413ECG,   |
| D737        | 225137DG or | SEL2413EDG or |
| D739-D765   | 225137DY    | SEL2413EDY    |
| D725, D726  | 225142      | SEL2913K      |
| D729, D732  | 225142      | SEL2913K      |
| D734, D736  | 225142      | SEL2913K      |
| D738        | 225142      | SEL2913K      |
|             | DIODE       |               |
| D766        | 223163      | 1SS133        |
|             | SWITCHES    |               |
| S701-S719   | 25035548    | NPS-111-S510  |
|             | HOLDERS     |               |
|             | 27190561A   | L.E.D         |
|             | 27190500    | Lamp          |

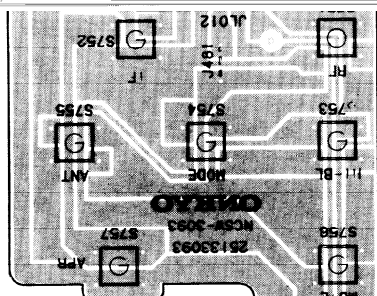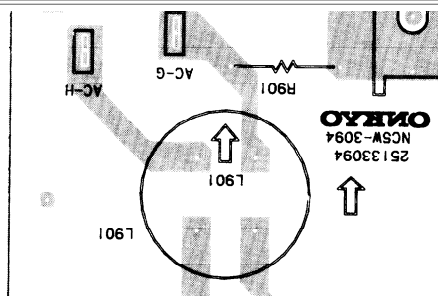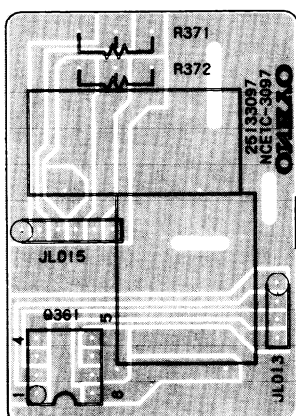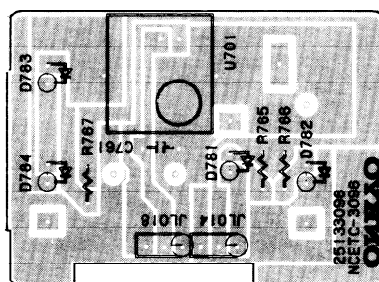OPERATION SWITCH  
PC BOARDPOWER SUPPLY CIRCUIT  
PC BOARDOUTPUT VOLUME  
PC BOARDREMOTE CONTROL  
CIRCUIT PC BOARDDE-EMPHASIS SWITCH  
PC BOARD**OPERATION SWITCH PC BOARD (NASW-3093-1)**

| CIRCUIT NO. | PART NO. | DESCRIPTION                 |
|-------------|----------|-----------------------------|
| S751-S759   | 25035548 | NPS-111-S510, Push switches |

**POWER SUPPLY CIRCUIT PC BOARD (NASW-3094-1/1A)**

| CIRCUIT NO. | PART NO.  | DESCRIPTION                      |
|-------------|-----------|----------------------------------|
| R901        | 431523355 | 3.3Mohm, 1/2W, Solid resistor(D) |
| L901        | 231051    | NCH-1092, Choke coil             |

**DE-EMPHASIS SWITCH PC BOARD (NASW-3095-1)**

(Only Worldwide models)

| CIRCUIT NO. | PART NO. | DESCRIPTION |
|-------------|----------|-------------|
| S351        | 25065240 | NSS-42102   |

**REMOTE CONTROL CIRCUIT PC BOARD (NAETC-3096-1)**


| CIRCUIT NO. | PART NO.  | DESCRIPTION                                  |
|-------------|-----------|----------------------------------------------|
| U701        | 241068    | BX-1407, IC, Remote control receiver section |
| D781        | 225141    | SEL2213C, L.E.D                              |
| D782-D784   | 225142    | SEL2913K, L.E.Ds                             |
|             | 27190562A | Holder, L.E.D                                |

**OUTPUT VOLUME PC BOARD (NAETC-3097-1)**

| REF. NO. | PART NO. | DESCRIPTION                            |
|----------|----------|----------------------------------------|
| Q361     | 222963   | LB1630, IC, motor driver               |
| R371     | 5104211  | N16RGL2KA30, Variable resistor, Volume |

NOTE: (D): Only 120V models  
 (G): Only 220V and 240V models  
 (W): Only Worldwide models

# PACKING VIEW

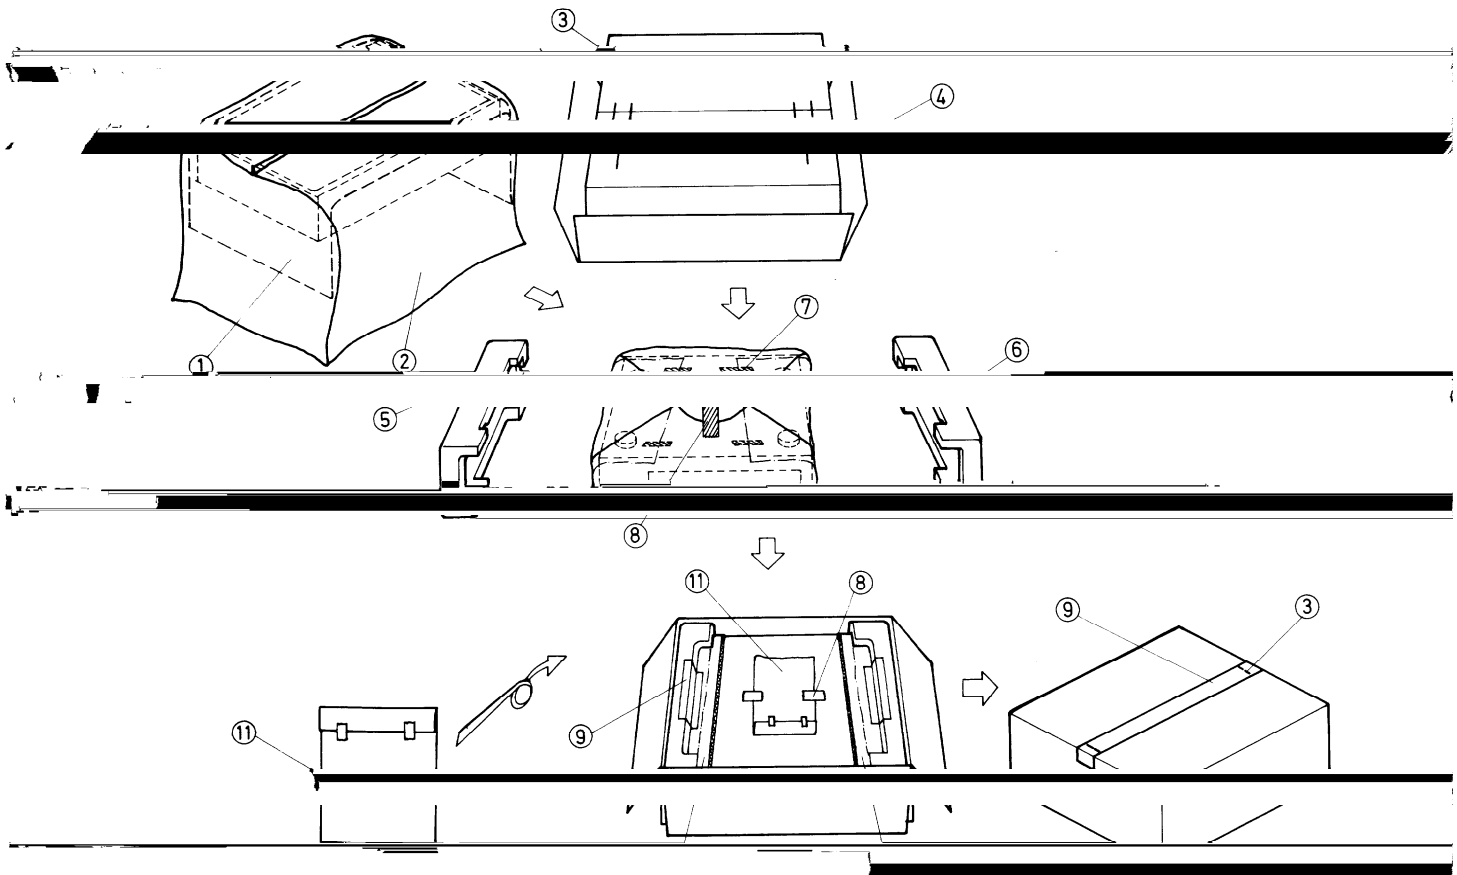

| REF. NO. | PART NO.            | DESCRIPTION                             |
|----------|---------------------|-----------------------------------------|
| 1        | 29095318            | 500 × 800mm, Protection sheet           |
| 2        | 29100038A           | 720 × 950mm, Poly-vinyl bag             |
| 3        | 282301              | Sealing hook                            |
| 4        | 29051604            | Master carton box                       |
| 5        | 29091197            | Pad R                                   |
| 6        | 29091196            | Pad L                                   |
| 7        | 262037              | 200mm, Drafting tape                    |
| 8        | 261504              | 30mm, Tape                              |
| 9        | 260012              | 100cm, Dampson tape                     |
| 10       | 29095491            | Sheet P                                 |
| 11       | Accessory bag ass'y |                                         |
|          | <b>120V models</b>  |                                         |
|          | 2010097             | Connection cord                         |
|          | 24140013            | RC-113T, Remote control unit            |
|          | 25060088            | Two adaptors for FM antenna             |
|          | 290264A             | FM antenna                              |
|          | 29341191            | Instruction manual                      |
|          | 3010054             | UM3, Two batteries                      |
|          | 29365006-7          | Warranty card (Only U.S.A model)        |
|          | 29358002E           | Service station list (Only U.S.A model) |
|          | 29100097            | 250 × 350mm, Poly-vinyl bag             |

| REF. NO.                | PART NO.  | DESCRIPTION                          |
|-------------------------|-----------|--------------------------------------|
| <b>220V/240V models</b> |           |                                      |
|                         | 2010097   | Connection cord                      |
|                         | 24140013  | RC-113T, Remote control unit         |
|                         | 25060088  | Two adaptors for FM antenna          |
|                         | 292064A   | FM antenna                           |
|                         | 29341192  | Instruction manual                   |
|                         | 29341208  | Instruction manual I                 |
|                         | 3010054   | UM3, Two batteries                   |
|                         | 29100097  | 250 × 350mm, Poly-vinyl bag          |
| <b>Worldwide models</b> |           |                                      |
|                         | 2010097   | Connection cord                      |
|                         | 24140013  | RC-113T, Remote control unit         |
|                         | 25060088  | Two adaptors for FM antenna          |
|                         | 292064A   | FM antenna                           |
|                         | 29341191  | Instruction manual (Only PX model)   |
|                         | 29341192  | Instruction manual                   |
|                         | 25055040  | CV-K-2, Conversion plug              |
|                         | 3010054   | UM3, Two batteries                   |
|                         | 29365021  | Warranty card (Only PX model)        |
|                         | 29358002E | Service station list (Only PX model) |
|                         | 29100097  | 250 × 350mm, Poly-vinyl bag          |

ONKYO CORPORATION

Telex: 2423551 ONKYO J. Phone: 03-432-6981

ONKYO U.S.A. CORPORATION